




TECHNOBOND WHITE SKIM COAT PRO SERIES

WHITE COLOR SKIM COAT FOR INTERNAL & EXTERNAL WALL



TECHNICAL DATA

Packing	25Kg
Colour	Off White
Mixing Ratio	25Kg Base + 8.5kg Clean Water 25Kg Finish + 12.5kg Clean Water
Coverage (Approx)	Base: 8m ² at 2mm thickness Finish: 19m ² at 1mm thickness
Grade	  
Item Code	380 Base C01D 388 Finish B03D

APPLICATION


EXTERNAL FINISHING



INTERNAL FINISHING



RC CEILING

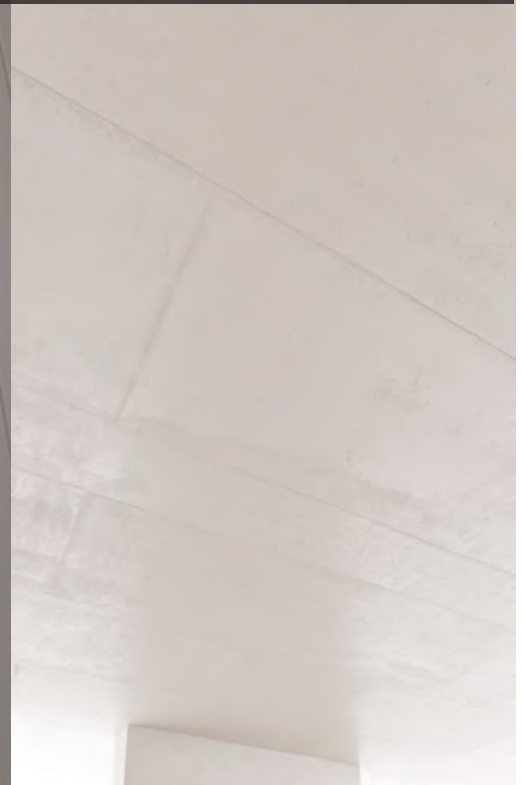

388 WHITE FINISH
HOW TO USE TECHNICAL DATA



380 WHITE BASE
TECHNICAL DATA





TECHNICAL DATA SHEET

TECHNOBOND BASE COAT WHITE 112 25KG

PRODUCT DESCRIPTION

TECHNOBOND Base Coat White 112 25kg is a high quality cement-based and water resistant skim coat base coat.

USES

Application as base coat on concrete substrate, hollow block & bricks, precast unit & most of the cement substrates.

ADVANTAGES

- ✓ Good crack bridging capability
- ✓ Mixes and applies easily
- ✓ Very good adhesion to substrates
- ✓ High compressive strength
- ✓ Non-toxic, same as cement
- ✓ Improve productivity

PRODUCT DATA

Form	: Powder
Appearance / Colours	: White
Packaging	: 25 kg
Storage Conditions / Shelf Life	: 12 months from the date of production if stored properly in original, unopened and undamaged sealed packaging, in cool, dry conditions. Keep away from direct sunlight.

TECHNICAL DATA

Binder	: Ordinary Portland Cement
Filler	: Graded Silica Sand / Limestone powder
Aggregate Size	: 0.5-1mm
Flexural Strength	: 5.4 N/mm ²

Compressive Strength : 14.3 N/mm²
(28 Days)

Recommended Thickness : Max 3mm

HEALTH AND SAFETY INFORMATION

For information and advice on the safe handling, storage, and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet (available upon request) containing physical, ecological toxicological and other safety-related data



SYSTEM INFORMATION

Application Details	: 25kg TECHNOBOND Base Coat White
Mixing ratio	: 112 + 8.5kg clean water
Coverage	: 9m ² at 1.5mm thickness (According to mixing ratio above)
Substrate Preparation	: Concrete or plaster surfaces must be clean, free from grease, oil and loosely adhering particles. Surface defects exceeding 4mm may be patched by TPS Patching Grey.

APPLICATION INSTRUCTIONS

Application Method / Tools	: Refer Method Statement.
Cleaning of Tools	: Clean all tools and application equipment with water immediately after use.
Pot Life (maximum)	: 180 ~ 240 minutes (at room temperature). Pot life is shorter at higher temperatures.
Notes on Application / Limitations	: Do not use on painted surface.

LEGAL NOTES

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

VIVO RAISER SDN. BHD. (920807-P)

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA

Phone: 04-4102148 Email: sales@shijiru.com Website: www.shijiru.com



ISO 9001:2015



METHOD STATEMENT

TECHNOBOND BASE COAT 380 WHITE



1. INTRODUCTION

TECHNOBOND Base Coat 380 White is a polymer-modified cement-based white base coat mortar formulated for internal wall and ceiling levelling and surface correction where a light-coloured background is required prior to the application of white or light-coloured skim coats and decorative finishes. It is suitable for internal applications on concrete, cement render, masonry, blockwork, and concrete ceilings.

2. SUBSTRATE PREPARATION & INSPECTION

- a) Ensure all substrates are structurally sound, clean, dry, and free from dust, oil, grease, curing compounds, laitance, loose particles, paint residues, rust stains, or contaminants that may affect adhesion or cause discoloration.
- b) Concrete substrates must be cured for a minimum of 28 days prior to application.
- c) Cement renders and masonry substrates must be cured for at least 7 days and checked for soundness. Hollow or loose areas must be removed and repaired.
- d) Absorbent substrates should be lightly dampened with clean water prior to application. Do not over-wet or leave standing water.
- e) Particular care must be taken to remove dark patches, oil stains, or efflorescence that may telegraph through light-coloured finishes.





VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



3. MATERIAL PREPARATION

- Packaging: 25 kg per bag
- Water requirement: Approximately 7.5–8 litres per 25 kg bag (30–32% by weight)
- Mixing water must be clean, potable, and free from impurities that may affect colour
- Typical thickness: 1-2 mm per layer (apply in multiple layers if greater thickness is required)

4. MIXING PROCEDURE

- a) Pour the measured clean water into a clean mixing container free from contamination by grey cement or other coloured materials.
- b) Gradually add TECHNOBOND Base Coat 380 White while mixing with a slow-speed mechanical mixer (400–600 rpm).
- c) Mix for 3–5 minutes until a smooth, uniform, lump-free consistency is achieved.
- d) Allow the mixture to stand (slake) for 3 minutes, then re-mix before application.
- e) Do not add additional water after mixing.

Pot life: Approximately 1 hour at 25°C.

5. APPLICATION

- a) For ceiling applications, ensure the substrate is sound and free from dust. Apply in thin layers within the recommended thickness to prevent sagging or debonding.
- b) a) Apply the mixed material onto the prepared substrate using a clean steel trowel dedicated for white products.
b) Spread evenly and level to the required thickness.
- c) For thickness exceeding 2 mm, apply in multiple layers, allowing the previous layer to firm up before applying the next.
- d) Avoid excessive trowelling which may cause surface discoloration or patchiness.
- e) Protect freshly applied surfaces from dust, dirt, rain, direct sunlight, and strong wind.

6. CURING & PROTECTION

- a) Allow the base coat to cure until sufficiently firm (minimum 24 hours at 25°C) before application of skim coat or subsequent finishes.
- b) Light mist curing with clean water may be carried out if required, particularly under hot or windy conditions.
- c) Full curing is typically achieved after 7 days, subject to ambient temperature and humidity.

7. QUALITY ASSURANCE & SAFETY

- Apply within recommended temperature range of 5°C–35°C.
- Maintain consistent water ratio to ensure colour uniformity.
- Use clean tools and equipment dedicated for white cement-based products.
- Wear appropriate PPE including gloves, goggles, and dust mask.



8. DISCLAIMER

This method statement is provided as a general guide only. Actual site conditions and workmanship are beyond the manufacturer's control.

TECHNOBOND SKIM COAT 388 FINISH COAT WHITE



1. INTRODUCTION

TECHNOBOND Skim Coat 388 Finish Coat White is a premium polymer-modified cement-based white skim coat designed to provide a smooth, uniform, and bright finishing surface for internal and external walls and ceilings prior to painting or decorative coatings. It is suitable for vertical and overhead (ceiling) applications where high whiteness and surface uniformity are required.

2. SUBSTRATE PREPARATION & INSPECTION

- a) Ensure the substrate or base coat is fully cured, sound, clean, and free from dust, oil, grease, rust stains, efflorescence, and loose particles.
- b) TECHNOBOND Base Coat 380 White or equivalent cementitious base must be cured until sufficiently firm (minimum 24 hours at 25°C) before skim coat application.
- c) Highly absorbent substrates should be lightly dampened with clean water. Do not oversaturate.

3. MATERIAL PREPARATION

- Packaging: 25 kg per bag
- Water requirement: Approximately 10.5–11.5 litres per 25 kg bag
- Mixing water must be clean, potable, and free from iron, rust, or organic contamination
- Typical thickness: 0.5–1.0 mm per layer

4. MIXING PROCEDURE

- a) Use a clean mixing container and tools dedicated for white products to prevent colour contamination.
- b) Pour the required amount of clean water into the container, then gradually add TECHNOBOND Skim Coat 388 White while mixing with a slow-speed mixer.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



- c) Mix for 3–5 minutes until a smooth, creamy, and lump-free paste is obtained.
- d) Allow the mixture to stand for 2–3 minutes, then re-mix before application.
- e) Do not add extra water, pigments, or additives once mixing is completed.

Pot life: Approximately 1 hour at 25°C.

5. APPLICATION

- a) For ceiling applications, ensure the substrate is sound and free from dust. Apply in thin layers within the recommended thickness to prevent sagging or debonding.
- b) a) Apply a thin and even layer of skim coat using a clean steel trowel.
- b) Spread smoothly to achieve a uniform, blemish-free surface.
- c) A second coat may be applied if required after the first coat has firmed up.
- d) Final finishing may be carried out using a steel trowel or sponge float as required. Do not retemper or add water during finishing.
- e) Avoid application under direct sunlight, rain, strong wind, or dusty site conditions.

6. CURING & PROTECTION

- a) Allow skim coat to dry for at least 24 hours before painting or applying decorative finishes. Ensure residual moisture content is suitable prior to paint application to avoid coating defects.
- b) Protect finished surfaces from dust, water splash, staining, and physical damage during curing.
- c) Ensure adequate ventilation for internal applications.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



7. QUALITY ASSURANCE & SAFETY

- Recommended application temperature: 5°C–35°C.
- Maintain consistent mixing and application practices to achieve uniform colour and finish.
- Use clean, non-rusting tools and equipment.
- Wear appropriate PPE. In case of eye or skin contact, rinse immediately with clean water.



8. DISCLAIMER

The information provided herein is based on current knowledge and experience. The manufacturer shall not be held responsible for variations arising from site conditions or workmanship.

SAFETY DATA SHEET

1. PRODUCT & COMPANY INFORMATION

General Product Name : **TECHNOBOND White Base 25Kg**
 Product Description : **Cement-based product formulated for thin plaster on concrete and block wall.**

2. COMPOSITION/INFORMATION ON INGREDIENTS

Name	CAS #	Description
Colored Composite Cement	65997-15-1	A preparation of cementitious mix based on a significant portion of portland cement or white cement, graded limestone powders, graded sand and other chemicals. Detail information on content is confidential.

3. HAZARDS IDENTIFICATION

Classification of the hazardous chemical

Skin corrosion/irritation : Category 2

Serious eye damage/eye irritation : Category 1

Skin sensitisation : Category 1

Label elements

Hazard pictograms :



Signal word : Danger

Hazard statements : H315 Causes skin irritation.
 H317 May cause an allergic skin reaction.
 H318 Causes serious eye damage.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



Precautionary statements

: **Prevention:**

P261 Avoid breathing dust.

P264 Wash skin thoroughly after handling.

P280 Wear protective gloves/ eye protection/ face protection.

Response:

P305 + P351 + P338 + P310 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.

P333 + P313 If skin irritation or rash occurs: Get medical advice/ attention.

P362 Take off contaminated clothing and wash before reuse.

Other hazards which do not result in classification

None known.

4. FIRST AID MEASURES

If irritation or other symptoms (as noted above) occur or persist from any route of exposure, remove the affected individual from the area and get medical aid.

EYES: Irrigate eyes with a heavy stream of water for at least 15 to 20 minutes. Occasionally lifting the upper and lower eyelids with fingers and roll eyes in circular motion. Get medical aid if needed.

SKIN: Wash exposed areas of the body with soap and water. Get medical aid if irritation develops or persists

INHALATION: Remove from area of exposure and move to fresh air immediately; seek medical attention if symptoms persist.

INGESTION: Never give anything by mouth to an unconscious person. Get medical aid. Do not induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cups or milk or water.

Note to Physician: Treat symptomatically and supportively.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



5. FIRE FIGHTING MEASURES

Ignition temperature: 285 C

EXTINGUISHING MEDIA:

Use water spray, dry chemical or foam. Carbon dioxide may be ineffective on a larger fires due to lack of cooling capacity which may result in reignition. Avoid hose streams or any method which will create dust clouds.

SPECIAL FIRE FIGHTING PROCEDURES:

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Runoff from fire control or dilution water may cause pollution.

UNUSUAL FIRE AND EXPLOSION HAZARDS:

All carbohydrates and dry chemical exhibits a potential dust explosion hazards if dust concentration in air is too high. Good housekeeping procedures are required to reduce this hazard.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment. Avoid breathing dust. Deny access to unprotected persons.

Environmental precautions : Do not flush into surface water or sanitary sewer system.

Methods and materials for containment and cleaning up : Pick up and arrange disposal without creating dust. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Handling:

Keep away from heat. Do not ingest. If ingested, seek medical advice immediately and show the container or the label. Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Avoid drinking, tasting, swallowing or ingesting this product. Provide eyewash fountains and safety showers in the work area.

Storage:

No special packaging required. Not classified as dangerous goods under the United Nations Transport Recommendations.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



8. EXPOSURE CONTROL /PERSONAL PROTECTION

Engineering Controls:

Facilities storing or utilizing this materials should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low. Always provide effective general and when necessary local exhaust ventilation to draw spray, aerosol, fume, mist, and vapour away from workers to prevent routine inhalation.

RESPIRATORY PROTECTION:

In case of insufficient ventilation, wear suitable respiratory equipment

PERSONAL PROTECTIVE EQUIPMENT EYES:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

OTHER PROTECTIVE MEASURES:

Employees must practice good personal hygiene, washing exposed areas of skin several times daily and laundering contaminated clothing before re-use.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Powder

Appearance: Grey/White

Odour: Odourless

PH @ 1.0% H₂O: 6.0 – 8.0

Vapour Pressure: Not available.

Vapour Density, Not available.

Boiling Point: Not available.

Freezing/ Melting Point: Not available.

Decomposition Temperature: Not available.

Volatiles, % by weight: Not available.

Specific Gravity (H₂O=1): Not available.

Solubility in H₂O, % by Volume: Soluble

Evaporation Rate: Not available.

Viscosity: Not available.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



10. STABILITY AND REACTIVITY

GENERAL: This product is stable.

CONDITIONS TO AVOID: Incompatible materials, dust generation, excess heat

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID: Strong oxidizing agents HAZARDOUS

DECOMPOSITION PRODUCTS: Combustion produces carbon monoxide, carbon dioxide.

HAZARDOUS POLYMERIZATION: Has not been reported.

11. Toxicological Information

Potential Health Effects:

CAUTION! Repeated inhalation of dust can cause sensitization to susceptible individuals & may cause eye irritation. Pre-existing skin problem may be aggravated by prolonged or repeated contact.

INHALATION: Dust inhalation may cause coughing, mucous production and shortness of breath.

EYE CONTACT: Direct contact may cause irritation.

SKIN CONTACT: Prolonged or repeated contact is no expected to create acute health effects.

INGESTION: No ingestion effect known.

Chronic health effects: None known

Symptoms / Sign of exposure: Irritation

Routes of exposure: Eye contact, Inhalation

Carcinogenic status: The components of this mixture are not known to be listed or regulated by IARC, NTP, OSHA, ACGIH.

As with all chemicals for which test data are limited or non-exist, caution must be exercised through the prudent use of protective equipment and handling procedure to minimise exposure.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



12. Ecological Information

Ecotoxicity

No data available

Persistence and degradability

No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : Send to a licensed waste management company.

Contaminated packaging : Empty remaining contents. Dispose of as unused product.
Do not re-use empty containers.

14. TRANSPORT INFORMATION

International Regulations

UNRTDG

UN number : Not applicable
Proper shipping name : Not applicable
Class : Not applicable
Subsidiary risk : Not applicable
Packing group : Not applicable
Labels : Not applicable
Environmentally hazardous : no

IATA-DGR

UN/ID No. : Not applicable
Proper shipping name : Not applicable
Class : Not applicable



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



Subsidiary risk : Not applicable
 Packing group : Not applicable
 Labels : Not applicable
 Packing instruction (cargo aircraft) : Not applicable
 Packing instruction (passenger aircraft) : Not applicable

IMDG-Code

UN number : Not applicable
 Proper shipping name : Not applicable
 Class : Not applicable
 Subsidiary risk : Not applicable
 Packing group : Not applicable
 Labels : Not applicable
 EmS Code : Not applicable
 Marine pollutant : Not applicable

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied. No special precautions are needed apart from those mentioned under heading 8.

15. REGULATORY INFORMATION:

Safety, health, and environmental regulations specific for the hazardous chemical

Occupational Safety and Health (Classification, Labelling and Safety Data Sheet of Hazardous Chemicals) Regulations 2013.

Occupational Safety and Health (Use and Standards of Exposure of Chemicals Hazardous to Health) Regulations 2000.

International Chemical Weapons Convention (CWC)

Schedules of Toxic Chemicals and Precursors: Not applicable



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



16. OTHER INFORMATION:

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parents companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.



The Singapore Environment Council hereby grant

Vivo Raiser Sdn Bhd

No 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani
08000, Kedah, Malaysia

the right to use the Singapore Green Label for

BASE COAT SERIES

022-145-3320

Environmentally Preferred Cement / Concrete Product

(In accordance to SEC Green Label Category 22: Cement and Concrete Products)

Validity: 21 August 2025 to 26 November 2026

Cheang Kok Chung
Executive Director



**Singapore
Environment
Council**



Certificate of Registration



This is to certify that the Environmental Management System of

VIVO RAISER SDN. BHD.

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

ISO 14001:2015
(Environmental Management System)

SCOPE

**Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and
Cementitious Waterproofing**

(IAF Code: 12)

Certificate Number : 180325026036

Initial Registration Date : 18-Mar-2025

1st Surveillance Date : 18-Feb-2026

Next Due Date : 17-Mar-2026

Certificate Expiry Date : 17-Mar-2028


To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited

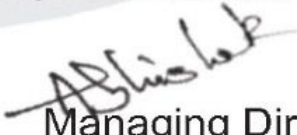
Managing Director



CB-MS-3926



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com

Certificate of Registration



This is to certify that the Occupational Health and Safety Management System of

VIVO RAISER SDN. BHD.

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

ISO 45001:2018

(Occupational Health and Safety Management System)

SCOPE

Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and
Cementitious Waterproofing

(IAF Code: 12)

Certificate Number : 270225036005

Initial Registration Date : 27-Feb-2025

st Surveillance Date : 27-Jan-2026

Next Due Date : 26-Feb-2026

Certificate Expiry Date : 26-Feb-2028

To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited


Managing Director



CB-MS-3919



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com

Certificate of Registration



This is to certify that the Quality Management System of

VIVO RAISER SDN. BHD.

SHIJIRU SDN. BHD.

HQ: No. 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani, 08000 Sungai Petani, Kedah Darul Aman, Malaysia.

Branch: No 27 & 29, Laluan Industri Lahat 1, Kawasan Perindustrian Lahat, 31450 Ipoh, Perak, Malaysia.

is in accordance with the requirements of the following standard

ISO 9001:2015

(Quality Management System)

SCOPE

Supply of Materials and Labour for Plastering, Skim Coating and Plasterboard Ceiling and Manufacture for Plaster Additive, Skim Coat, Render, Tile-Adhesive and Cementitious Waterproofing Chemical

(IAF Code: 29,35,12)

Certificate Number : 111125016018

Initial Registration Date : 11-Nov-2025

1st Surveillance Date : 10-Oct-2026

Next Due Date : 10-Nov-2026

Certificate Expiry Date : 10-Nov-2028

To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited

Abhishek
Managing Director



CB-MS-3923



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com