


# TPS SKIM COAT WHITE PREMIUM PRO SERIES

WHITE SKIM COAT FOR INTERNAL & EXTERNAL IBS WALL & PAINTED SURFACE

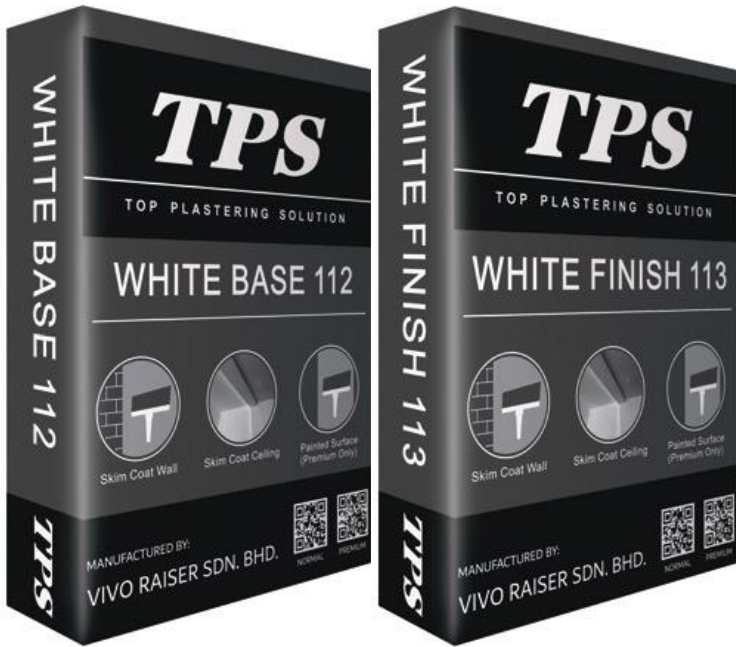

## TECHNICAL DATA

<b>Packing</b>	40Kg
<b>Colour</b>	Off White
<b>Mixing Ratio</b>	20Kg Base + 6.5kg Clean Water 20Kg Finish + 10kg Clean Water
<b>Coverage (Approx)</b>	Base: 14m <sup>2</sup> at 1mm thickness Finish: 60m <sup>2</sup> at 0.5mm thickness
<b>Grade</b>	  
<b>Item Code</b>	112 Base Premium C01A 113 Finish Premium C02A
<b>Thickness (Approx Per Coat)</b>	Base: 1-3mm Finish: 0.5-1.5mm
<b>Surface Thickness</b>	Recommendation: TPS Skim Coat TPS Render Grey + TPS Skim Coat Cement Sand Plaster TPS Skim Coat

## APPLICATION

PAINT FREE DESIGNER WALL



WATERPROOF EXTERNAL SKIM COAT



TECHNICAL DATA WHITE BASE



WHITE FINISH



VALUED CUSTOMER





# TECHNICAL DATA SHEET

## TPS WHITE BASE 112 (PREMIUM)

### PRODUCT DESCRIPTION

TPS White Base 112 (Premium) is a high quality cement-based and water resistant skim coat base coat.

### USES

Application as base coat on concrete substrate, hollow block & bricks, precast unit & most of the cement substrates.

### ADVANTAGES

- ✓ Good crack bridging capability
- ✓ Mixes and applies easily
- ✓ Very good adhesion to substrates
- ✓ High compressive strength
- ✓ Non-toxic, same as cement
- ✓ Improve productivity

### PRODUCT DATA

Form	: Powder
Appearance / Colours	: White
Packaging	: 40 kg
Storage Conditions / Shelf Life	: 6 months from the date of production if stored properly in original, unopened and undamaged sealed packaging, in cool, dry conditions. Keep away from direct sunlight.

### TECHNICAL DATA

Binder	: Ordinary Portland Cement
Filler	: Graded Silica Sand / Limestone powder
Aggregate Size	: 0.5-1mm
Flexural Strength	: ~2 N/mm <sup>2</sup>
Compressive Strength (28 Days)	: ~5 N/mm <sup>2</sup>
Recommended Thickness	: Max 3mm

### HEALTH AND SAFETY INFORMATION

For information and advice on the safe handling, storage, and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet (available upon request) containing physical, ecological toxicological and other safety-related data



### SYSTEM INFORMATION

Application Details	: 20kg TPS White Base 112 (Premium) + 6kg clean water
Mixing ratio	: 14m <sup>2</sup> at 1 - 3mm thickness (According to mixing ratio above)
Coverage	: Concrete or plaster surfaces must be clean, free from grease, oil, and loosely adhering particles. Surface defects exceeding 4mm may be patched by TPS Patching Grey.
Substrate Preparation	: Concrete or plaster surfaces must be clean, free from grease, oil, and loosely adhering particles. Surface defects exceeding 4mm may be patched by TPS Patching Grey.

### APPLICATION INSTRUCTIONS

Application Method / Tools	: Refer Method Statement.
Cleaning of Tools	: Clean all tools and application equipment with water immediately after use.
Pot Life (maximum)	: 90 minutes (at room temperature). Pot life is shorter at higher temperatures.

### LEGAL NOTES

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Vivo Raiser Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

VIVO RAISER SDN. BHD. (920807-P)

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA

Phone: 04-4102148 Email: sales@shijiru.com Website: www.shijiru.com





**VIVO RAISER SDN. BHD.** (920807-P)  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
Phone: 04-4102148      Email: [sales@shijiru.com](mailto:sales@shijiru.com)



# **METHOD STATEMENT FOR TPS WHITE BASE**

## **1. INTRODUCTION**

TPS White Base is a high quality cement-based and water resistant skim coat base coat.

## **2. SUBSTRATE EXAMINATION**

Before carrying out plastering works, ensure that: -

- Concrete or plaster surfaces must be clean, free from grease, oil and loosely adhering particles.
- Surface defects exceeding 4mm may be patched by TPS Patching Grey
- Wetting of high absorbing substrates is recommended if the substrate is too dry before the application of TPS White Base.



**VIVO RAISER SDN. BHD.** (920807-P)  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
Phone: 04-4102148      Email: [sales@shijiru.com](mailto:sales@shijiru.com)



#### **4. APPLICATION**

- a. Mix 40kg of TPS White Base with 13litres of clean water until a desired homogeneous paste is achieved. Additional water can be added if required.
- b. Ensure the mix is free from lump before use.
- b. A resting time of 3 minutes is recommended for best consistency.
- c. TPS White Base mortar is applied using a steel trowel or spatula. As good practice, a maximum thickness of 3mm is recommended (2-3 coats).
- d. Finishing should be apply with TPS White Finish.

#### **5. REMARK**

- TPS White Base is suitable for interior use only.
- TPS White Base should not be applied on painted surfaces.

#### **6. DISCLAIMER**

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

Last Update:21/04/2025



# VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
☎ 04-4102148      ✉ sales@shijiru.com



VR2022-011

## SAFETY DATA SHEET

### 1. PRODUCT & COMPANY INFORMATION

General Product Name : **TPS Grey Base (Premium) / TPS White Base (Premium)**  
Product Description : **Cement-based product formulated for thin plaster on concrete and block wall.**

### 2. COMPOSITION/INFORMATION ON INGREDIENTS

Name	CAS #	Description
Colored Composite Cement	65997-15-1	A preparation of cementitious mix based on a significant portion of portland cement or white cement, graded limestone powders, graded sand and other chemicals. Detail information on content is confidential.

### 3. HAZARDS IDENTIFICATION

#### Classification of the hazardous chemical

Skin corrosion/irritation : Category 2  
Serious eye damage/eye irritation : Category 1  
Skin sensitisation : Category 1

#### Label elements

Hazard pictograms :

Signal word : Danger

Hazard statements : H315 Causes skin irritation.  
H317 May cause an allergic skin reaction.  
H318 Causes serious eye damage.



# VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
☎ 04-4102148      ✉ sales@shijiru.com



VR2022-011

Precautionary statements : **Prevention:**  
 P261 Avoid breathing dust.  
 P264 Wash skin thoroughly after handling.  
 P280 Wear protective gloves/ eye protection/ face protection.

**Response:**  
 P305 + P351 + P338 + P310 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.  
 P333 + P313 If skin irritation or rash occurs: Get medical advice/ attention.  
 P362 Take off contaminated clothing and wash before reuse.

### Other hazards which do not result in classification

None known.

---

## 4. FIRST AID MEASURES

If irritation or other symptoms (as noted above) occur or persist from any route of exposure, remove the affected individual from the area and get medical aid.

**EYES:** Irrigate eyes with a heavy stream of water for at least 15 to 20 minutes. Occasionally lifting the upper and lower eyelids with fingers and roll eyes in circular motion. Get medical aid if needed.

**SKIN:** Wash exposed areas of the body with soap and water. Get medical aid if irritation develops or persists

**INHALATION:** Remove from area of exposure and move to fresh air immediately; seek medical attention if symptoms persist.

**INGESTION:** Never give anything by mouth to an unconscious person. Get medical aid. Do not induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cups or milk or water.

**Note to Physician:** Treat symptomatically and supportively.



## VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
☎ 04-4102148      ✉ sales@shijiru.com



VR2022-011

---

### 5. FIRE FIGHTING MEASURES

#### Extinguishing Media

Dry chemical, foam, water, or extinguishing media appropriate for surrounding fire.

#### Unusual Fire and Explosion Hazards

Material poses no fire-related hazard.

#### Special hazards arising from the mixture

None known

#### Special Protective Equipment and Precautions for Firefighters

A SCBA is recommended to limit exposures to combustion products when fighting any fire.

---

### 6. ACCIDENTAL RELEASE MEASURES

**Personal precautions, protective equipment and emergency procedures** : Use personal protective equipment. Avoid breathing dust. Deny access to unprotected persons.

**Environmental precautions** : Do not flush into surface water or sanitary sewer system.

**Methods and materials for containment and cleaning up** : Pick up and arrange disposal without creating dust. Keep in suitable, closed containers for disposal.

---

### 7. HANDLING AND STORAGE

#### Handling:

Keep away from heat. Do not ingest. If ingested, seek medical advice immediately and show the container or the label. Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Avoid drinking, tasting, swallowing or ingesting this product. Provide eyewash fountains and safety showers in the work area.

#### Storage:

No special packaging required. Not classified as dangerous goods under the United Nations Transport Recommendations.

Page 3 of 8

ISSUE DATE: 1.12.2022



## VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
☎ 04-4102148      ✉ sales@shijiru.com



VR2022-011

---

### 8. EXPOSURE CONTROL /PERSONAL PROTECTION

#### Engineering Controls:

Facilities storing or utilizing this materials should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low. Always provide effective general and when necessary local exhaust ventilation to draw spray, aerosol, fume, mist, and vapour away from workers to prevent routine inhalation.

#### RESPIRATORY PROTECTION:

In case of insufficient ventilation, wear suitable respiratory equipment

#### PERSONAL PROTECTIVE EQUIPMENT EYES:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

#### OTHER PROTECTIVE MEASURES:

Employees must practice good personal hygiene, washing exposed areas of skin several times daily and laundering contaminated clothing before re-use.

---

### 9. PHYSICAL AND CHEMICAL PROPERTIES

**Physical State:** Powder

**Appearance:** Grey/White

**Odour:** Odourless

**PH @ 1.0% H<sub>2</sub>O:** 6.0 – 8.0

**Vapour Pressure:** Not available.

**Vapour Density,** Not available.

**Boiling Point:** Not available.

**Freezing/ Melting Point:** Not available.

**Decomposition Temperature:** Not available.

**Volatiles, % by weight:** Not available.

**Specific Gravity (H<sub>2</sub>O=1):** Not available.

**Solubility in H<sub>2</sub>O, % by Volume:** Soluble

**Evaporation Rate:** Not available.

**Viscosity:** Not available.



## VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-011

---

### 10. STABILITY AND REACTIVITY

**GENERAL:** This product is stable.

**CONDITIONS TO AVOID:** Incompatible materials, dust generation, excess heat

**INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:** Strong oxidizing agents HAZARDOUS

**DECOMPOSITION PRODUCTS:** Combustion produces carbon monoxide, carbon dioxide.

**HAZARDOUS POLYMERIZATION:** Has not been reported.

---

### 11. Toxicological Information

#### Potential Health Effects:

CAUTION! Repeated inhalation of dust can cause sensitization to susceptible individuals & may cause eye irritation. Pre-existing skin problem may be aggravated by prolonged or repeated contact.

**INHALATION:** Dust inhalation may cause coughing, mucous production and shortness of breath.

**EYE CONTACT:** Direct contact may cause irritation.

**SKIN CONTACT:** Prolonged or repeated contact is no expected to create acute health effects.

**INGESTION:** No ingestion effect known.

**Chronic health effects:** None known

**Symptoms / Sign of exposure:** Irritation

**Routes of exposure:** Eye contact, Inhalation

**Carcinogenic status:** The components of this mixture are not known to be listed or regulated by IARC, NTP, OSHA, ACGIH.

As with all chemicals for which test data are limited or non-exist, caution must be exercised through the prudent use of protective equipment and handling procedure to minimise exposure.



# VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-011

## 12. Ecological Information

### Ecotoxicity

No data available

### Persistence and degradability

No data available

### Bioaccumulative potential

No data available

### Mobility in soil

No data available

## 13. DISPOSAL CONSIDERATIONS

### Disposal methods

**Waste from residues** : Send to a licensed waste management company.

**Contaminated packaging** : Empty remaining contents. Dispose of as unused product.  
Do not re-use empty containers.

## 14. TRANSPORT INFORMATION

### International Regulations

#### UNRTDG

UN number : Not applicable  
Proper shipping name : Not applicable  
Class : Not applicable  
Subsidiary risk : Not applicable  
Packing group : Not applicable  
Labels : Not applicable  
Environmentally hazardous : no

#### IATA-DGR

UN/ID No. : Not applicable



# VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
☎ 04-4102148      ✉ sales@shijiru.com



VR2022-011

Proper shipping name : Not applicable  
Class : Not applicable

Subsidiary risk : Not applicable  
Packing group : Not applicable  
Labels : Not applicable  
Packing instruction (cargo aircraft) : Not applicable  
Packing instruction (passenger aircraft) : Not applicable

### IMDG-Code

UN number : Not applicable  
Proper shipping name : Not applicable  
Class : Not applicable  
Subsidiary risk : Not applicable  
Packing group : Not applicable  
Labels : Not applicable  
EmS Code : Not applicable  
Marine pollutant : Not applicable

### Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied. No special precautions are needed apart from those mentioned under heading 8.

---

## 15. REGULATORY INFORMATION:

### Safety, health, and environmental regulations specific for the hazardous chemical

Occupational Safety and Health (Classification, Labelling and Safety Data Sheet of Hazardous Chemicals) Regulations 2013.

Occupational Safety and Health (Use and Standards of Exposure of Chemicals Hazardous to Health) Regulations 2000.

International Chemical Weapons Convention (CWC)

Schedules of Toxic Chemicals and Precursors: Not applicable



## VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
☎ 04-4102148      ✉ sales@shijiru.com



VR2022-011

---

### 16. OTHER INFORMATION:

SDS Prepared by: Vivo Raiser Sdn Bhd

Phone Number: +6044102148


Date of Preparation: 1 January 2017

Revision indicators and Date

Effective Date Change: 9 May 2018 Supersedes: 5 May 2018

Format Changes: Conforms to OSHA 29CFR 1910.1200 (HCS)

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parents companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.



SIRIM QAS International Sdn. Bhd. (410334-X)  
No. 1, Persiaran Dato' Menteri, Section 2, P.O. Box 7035,  
40700 Shah Alam, Selangor Darul Ehsan, Malaysia  
Tel: 03-55445854/5856  
Fax: 03-55445886  
www.sirim-qas.com.my

## TEST REPORT

REPORT NO : 2016CB1425

PAGE : 1 OF 6

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.

Applicant. : VIVO RAISER SDN. BHD.  
9 & 10, Jalan PKNK 3/7,  
Kawasan Perusahaan Sungai Petani,  
08000 Sungai Petani,  
Kedah Darul Aman.

Manufacturer : VIVO RAISER SDN. BHD.

Product : Plastering Mortar

Reference Standard/ : BS EN 998-1 : 2010  
Method of test : Specification – Part 1: Rendering and plastering mortar  
Clause 5.2: Properties of hardened mortars  
L1 : Dry bulk density  
L2 : Compressive strength  
L3 : Adhesion  
L4 : Capillary water absorption  
Clause 5.3 : Properties of fresh mortars  
Clause 5.3.1 : Workable life  
Clause 5.3.2 : Air content

Description of sample : One (1) of bag of 15 kg of Plastering Mortar was received for testing.  
Brand: TPS  
Model : TPS Grey & White Base

Date Received of : 09<sup>th</sup> May 2016  
Complete Application

Job No./Ref. No. : J20161430480/SQAS/CCST/T.REC/CSL/13

Description of test : The test report covers only test clauses as requested by Applicant to  
results SIRIM QAS International Sdn Bhd. The test results for the submitted test  
samples as described in this test report complied with the requirements  
of the above reference standard at the respective clauses tested.

Issued date :

09 AUG 2016

Approved Signatory

(MOHD HAFIZ MOHD NASIR)  
Testing Executive



RAJA NOR SIHA RAJA ABD. HANAN)  
Head  
Civil & Construction Section  
Testing Services Department

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.

**TEST RESULTS:**

Product : Plastering Mortar  
 Brand : TPS  
 Model : TPS Grey & White Base  
 Mix Proportion : 15 kg TPS Patching Grey & White : 4.2 Liter of Clean water  
 Method of Test : 1) BS EN 998-1 : 2010  
 Mortar for masonry – Specification – Part 1: Rendering and plastering mortar  
 2) BS EN 1015-10: 1999,  
 Methods of test for mortar for masonry – Part 10: Determination of dry bulk density of hardened mortar

CLAUSE	TEST METHOD/REQUIREMENT	TEST RESULTS	REMARK
5.2 5.2.1	Properties of hardened mortar General The properties relevant to the intended use and/or type of product shall be declared according table 2.  GP: General purpose rendering/plastering mortar  L1: Dry Bulk Density	<u>Dry Bulk density</u>  1) 1380 kg/m <sup>3</sup> 2) 1370 kg/m <sup>3</sup> 3) 1380 kg/m <sup>3</sup> Mean: 1380 kg/m <sup>3</sup>	Declared range of values by manufacturer

09 AUG 2016



\_\_\_\_\_  
*[Signature]*

2016CB1425

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.


**TEST RESULTS:**


Product : Plastering Mortar  
 Brand : TPS  
 Model : TPS Grey & White Base  
 Mix Proportion : 15 kg TPS Patching Grey & White : 4.2 Liter of Clean water  
 Method of Test : 1) BS EN 998-1 : 2010  
 Mortar for masonry – Specification – Part 1: Rendering and plastering mortar  
 2) BS EN 1015-11: 1999,  
 Methods of test for mortar for masonry – Part 11: Determination of flexural and compressive strength of hardened mortar

CLAUSE	TEST METHOD/REQUIREMENT	TEST RESULTS	REMARK
5.2 5.2.1	<p>Properties of hardened mortar                      General                      The properties relevant to the intended use and/or type of product shall be declared according table 2.</p> <p>Classification for hardened mortar properties.</p> <p>GP: General purpose rendering/plastering mortar</p> <p>L2: Compressive strength                      Range of Compressive strength at 28 days                      - Categories CS IV : <math>\geq 6.0 \text{ N/mm}^2</math></p>	<p><u>Flexural Strength</u></p> <p>1) <math>5.6 \text{ N/mm}^2</math>                      2) <math>4.9 \text{ N/mm}^2</math>                      3) <math>5.6 \text{ N/mm}^2</math>                      Mean: <math>5.4 \text{ N/mm}^2</math></p> <p><u>Compressive Strength</u></p> <p>1) <math>15.5 \text{ N/mm}^2</math>                      2) <math>15.3 \text{ N/mm}^2</math>                      3) <math>14.5 \text{ N/mm}^2</math>                      4) <math>10.4 \text{ N/mm}^2</math>                      5) <math>15.8 \text{ N/mm}^2</math>                      6) <math>14.3 \text{ N/mm}^2</math>                      Mean: <math>14.3 \text{ N/mm}^2</math></p>	<p>Declared by manufacturer</p> <p>Pass</p>

09 AUG 2016

\_\_\_\_\_





This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.

**TEST RESULTS:**

Product : Plastering Mortar  
 Brand : TPS  
 Model : TPS Grey & White Base  
 Mix Proportion : 15 kg TPS Patching Grey & White : 4.2 Liter of Clean water  
 Method of Test : 1) BS EN 998-1 : 2010  
 Mortar for masonry – Specification – Part 1: Rendering and plastering mortar  
 2) BS EN 1015-12: 2000,  
 Methods of test for mortar for masonry – Part 12: Determination of adhesive strength of hardened rendering and plastering mortars on substrates

CLAUSE	TEST METHOD/REQUIREMENT	TEST RESULTS	REMARK
5.2 5.2.1	Properties of hardened mortar General The properties relevant to the intended use and/or type of product shall be declared according table 2.  GP: General purpose rendering/plastering mortar  L3: Adhesion	<u>Adhesion Strength</u>  1) 0.68 N/mm <sup>2</sup> 2) 0.47 N/mm <sup>2</sup> 3) 0.46 N/mm <sup>2</sup> 4) 0.52 N/mm <sup>2</sup> 5) 0.51 N/mm <sup>2</sup> <b>Mean: 0.53 N/mm<sup>2</sup></b>  <u>Fracture pattern</u> Fracture pattern a: Adhesion fracture – Fracture at the interface between mortar and adhesive	≥ Declared value and fracture pattern (FP) by manufacturer

09 AUG 2016



This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.

**TEST RESULTS:**

Product                      Plastering Mortar  
 Brand                        TPS  
 Model                        TPS Grey & White Base  
 Mix Proportion            15 kg TPS Patching Grey & White : 4.2 Liter of Clean water  
 Method of Test            1) BS EN 998-1 : 2010  
                                   Mortar for masonry – Specification – Part 1: Rendering and plastering mortar  
                                   2) BS EN 1015-18: 2002.  
                                   Methods of test for mortar for masonry – Part 18: Determination of water absorption coefficient due to capillary action of hardened mortar

CLAUSE	TEST METHOD/REQUIREMENT	TEST RESULTS	REMARK
5.2 5.2.1	Properties of hardened mortar General The properties relevant to the intended use and/or type of product shall be declared according table 2.  GP: General purpose rendering/plastering mortar  L5: Capillary water absorption - Categories W 0 : Not Specified  Coefficient of capillary water absorption	1) 0.6 kg/m <sup>2</sup> .min <sup>0.5</sup> 2) 0.5 kg/m <sup>2</sup> .min <sup>0.5</sup> 3) 0.5 kg/m <sup>2</sup> .min <sup>0.5</sup> 4) 0.3 kg/m <sup>2</sup> .min <sup>0.5</sup> 5) 0.3 kg/m <sup>2</sup> .min <sup>0.5</sup> 6) 0.3 kg/m <sup>2</sup> .min <sup>0.5</sup> Mean: 0.4 kg/m <sup>2</sup> .min <sup>0.5</sup>	Pass

09 AUG 2016



\_\_\_\_\_


This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.

**TEST RESULTS:**

Product : Plastering Mortar  
 Brand : TPS  
 Model : TPS Grey & White Base  
 Mix Proportion : 15 kg TPS Patching Grey & White : 4.2 Liter of Clean water  
 Method of Test : 1) BS EN 998-1 : 2010  
 Mortar for masonry – Specification – Part 1: Rendering and plastering mortar  
 2) BS EN 1015-7: 1999,  
 Methods of test for mortar for masonry – Part 7: Determination of air content of fresh mortar  
 3) BS EN 1015-9: 1999,  
 Methods of test for mortar for masonry – Part 9: Determination of workable life and correction time of fresh mortar

CLAUSE	TEST METHOD/REQUIREMENT	TEST RESULTS	REMARK
5.3 5.3.1	Properties of fresh mortar Workable Life The workable life shall be declared by the manufacturer - Method A: Workable Life of General Purpose mortar	<u>Workable life</u>  Resistance at 0.5 N/mm <sup>2</sup> : <b>360 min</b> Resistance at 1.0 N/mm <sup>2</sup> : <b>450 min</b> Resistance at 1.5 N/mm <sup>2</sup> : <b>510 min</b>	Declared by manufacturer
5.3.2	Air Content The air content shall fall as declared by the manufacturer - Method A: Pressure Methods	<u>Air Content</u>  1) 13.0 % 2) 13.0 % <b>Mean: 13.0 %</b>	Declared by manufacturer

09 AUG 2016



		
--	---	---



The Singapore Environment Council hereby grant

## **Vivo Raiser Sdn Bhd**

No 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani  
08000, Kedah, Malaysia

the right to use the Singapore Green Label for

**BASE COAT SERIES**

**022-145-3320**

**Environmentally Preferred Cement / Concrete Product**

(In accordance to SEC Green Label Category 22: Cement and Concrete Products)

Validity: 21 August 2025 to 26 November 2026

---

Cheang Kok Chung  
Executive Director



**Singapore  
Environment  
Council**



# Certificate of Registration



This is to certify that the Environmental Management System of

**VIVO RAISER SDN. BHD.**

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

**ISO 14001:2015**  
(Environmental Management System)

## SCOPE

**Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and  
Cementitious Waterproofing**

(IAF Code: 12)

Certificate Number : 180325026036

Initial Registration Date : 18-Mar-2025

1<sup>st</sup> Surveillance Date : 18-Feb-2026

Next Due Date : 17-Mar-2026

Certificate Expiry Date : 17-Mar-2028

**To verify certificate, visit at :**

[www.arscert.com](http://www.arscert.com)

[www.uafaccreditation.org](http://www.uafaccreditation.org)

[www.iafcertsearch.org](http://www.iafcertsearch.org)

Issued by ARS Assessment Private Limited

  
Managing Director



CB-MS-3926



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on [info@arscert.com](mailto:info@arscert.com)

# Certificate of Registration



This is to certify that the Occupational Health and Safety Management System of

**VIVO RAISER SDN. BHD.**

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

**ISO 45001:2018**

(Occupational Health and Safety Management System)

## SCOPE

Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and  
Cementitious Waterproofing

(IAF Code: 12)

Certificate Number : 270225036005

Initial Registration Date : 27-Feb-2025

<sup>st</sup> Surveillance Date : 27-Jan-2026

Next Due Date : 26-Feb-2026

Certificate Expiry Date : 26-Feb-2028


**To verify certificate, visit at :**

[www.arscert.com](http://www.arscert.com)

[www.uafaccreditation.org](http://www.uafaccreditation.org)

[www.iafcertsearch.org](http://www.iafcertsearch.org)

Issued by ARS Assessment Private Limited

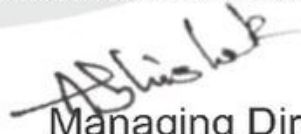  
Managing Director



CB-MS-3919



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on [info@arscert.com](mailto:info@arscert.com)

# Certificate of Registration



This is to certify that the Quality Management System of

**VIVO RAISER SDN. BHD.**

**SHIJIRU SDN. BHD.**

HQ: No. 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani, 08000 Sungai Petani, Kedah Darul Aman, Malaysia.

Branch: No 27 & 29, Laluan Industri Lahat 1, Kawasan Perindustrian Lahat, 31450 Ipoh, Perak, Malaysia.

is in accordance with the requirements of the following standard

## ISO 9001:2015

(Quality Management System)

### SCOPE

Supply of Materials and Labour for Plastering, Skim Coating and Plasterboard Ceiling and Manufacture for Plaster Additive, Skim Coat, Render, Tile-Adhesive and Cementitious Waterproofing Chemical

(IAF Code: 29,35,12)

Certificate Number : 111125016018

Initial Registration Date : 11-Nov-2025

1<sup>st</sup> Surveillance Date : 10-Oct-2026

Next Due Date : 10-Nov-2026

Certificate Expiry Date : 10-Nov-2028

**To verify certificate, visit at :**

[www.arscert.com](http://www.arscert.com)

[www.uafaccreditation.org](http://www.uafaccreditation.org)

[www.iafcertsearch.org](http://www.iafcertsearch.org)

Issued by ARS Assessment Private Limited

*Abhishek*  
Managing Director



CB-MS-3923



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on [info@arscert.com](mailto:info@arscert.com)