




TPS BONDING AGENT

ADMIXTURE TO GREATLY IMPROVE BONDING, TENSILE, FLEXURAL & DURABILITY



TECHNICAL DATA

Packing	<input type="checkbox"/> 5Kg <input type="checkbox"/> 20Kg <input type="checkbox"/> 1000Kg
Binder	Styrene Acrylic Latex
Thickness	1-2mm Per Coat
Grade	  
Item Code	<p>NORMAL GRADE</p> <p>5Kg TPS G03 20Kg TPS G03A</p> <p>PREMIUM GRADE</p> <p>5Kg TPS G04 20Kg TPS G04A</p>





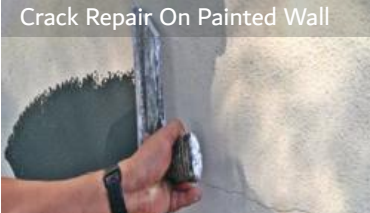
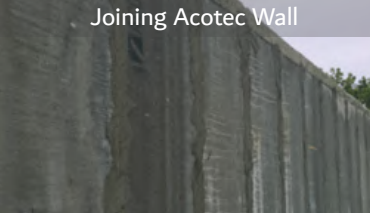




Excellent Water & UV Resistance



Excellent Bonding Property
Perfect for Concrete & Cement Substrate

APPLICATION

<p>External Skim Coat White</p>  <p>10kg TPS White Base & Finish +2kg TPS Bonding Agent + 2kg Clean Water</p>	<p>External Skim Coat Grey</p>  <p>10kg TPS Grey Base & Finish +2kg TPS Bonding Agent + 2kg Clean Water</p>	<p>Corner Bead Installation</p>  <p>10kg OPC + 1kg TPS Bonding Agent + 2kg Water</p>	<p>Tiles On Tiles Installation</p>  <p>10kg TPS Thin Bed Adhesive (P) + 3kg TPS Bonding Agent</p>
<p>Crack Repair On Painted Wall</p>  <p>10kg TPS Patching Grey / White +2kg TPS Bonding Agent + 2kg Clean Water</p>	<p>Joining Acotec Wall</p>  <p>10kg TPS Thin Bed Adhesive (P) + 2kg TPS Bonding Agent + 2kg Clean Water</p>	<p>Apply Scratch Coat</p>  <p>10kg TPS Patching + 2kg TPS Bonding Agent + 2kg Water</p>	<p>2' x 2' Tiles Installation</p>  <p>10kg TPS Thin Bed Adhesive (N) + 3kg TPS Bonding Agent + 1kg Clean Water</p>

Above information is only for general guidance. It is impossible to give specific instruction for various site condition or to control the application.

TECHNICAL DATA

NORMAL



PREMIUM



HOW TO USE
(TILING)

BM



华语





TECHNICAL DATA SHEET

TPS BONDING AGENT PREMIUM

PRODUCT DESCRIPTION

TPS Bonding Agent Premium is a general-purpose premium liquid admixture based on acrylic latex polymers.

USES

- ✓ Grouts and screeds
- ✓ Patch up repair mortars on painted or wood surface
- ✓ Masonry mortars with improved waterproofing properties
- ✓ Premium Render
- ✓ C2 Tile adhesive

ADVANTAGES

- ✓ Good crack bridging capability
- ✓ Mixes and applies easily
- ✓ Easily applied by roller or brush
- ✓ Excellent adhesion
- ✓ Increased frost and salt resistance
- ✓ Decreases carbon dioxide penetration
- ✓ Non-toxic
- ✓ Flexible Cementitious
- ✓ Economical, money for value

PRODUCT DATA

Appearance / Colours : Milk White
Packaging : 5 Litre Jerry Can
Storage Conditions / Shelf Life : 12 months from the date of production if stored properly in original, unopened, and undamaged sealed packaging, in cool, dry conditions. Keep away from direct sunlight.

TECHNICAL DATA

Chemical Base : Polymer modified styrene acrylic
Elongation at Break : > 100%
Substrate Quality : Concrete and brick surfaces must be clean, free from grease, oil and loosely adhering particles.

HEALTH AND SAFETY INFORMATION

For information and advice on the safe handling, storage, and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet (available upon request) containing physical, ecological toxicological and other safety-related data



APPLICATION INSTRUCTIONS

Application Method / Tools : Refer Method Statement.
Cleaning of Tools : Clean all tools and application equipment with water immediately after use. Hardened and/or cured material can only be mechanically removed.
Pot Life (maximum) : 60 minutes (at room temperature)
Pot life will be shorter at higher temperatures.
Notes on Application / Limitations : Never apply more than 2 kg/m² of TPS Bonding agent (P) in a single layer.

LEGAL NOTES

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

VIVO RAISER SDN. BHD. (920807-P)

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA

Phone: 04-4102148 Email: sales@shijiru.com Website: www.shijiru.com



华语

BM

华语

ISO 9001:2015



METHOD STATEMENT FOR TPS BONDING AGENT PREMIUM

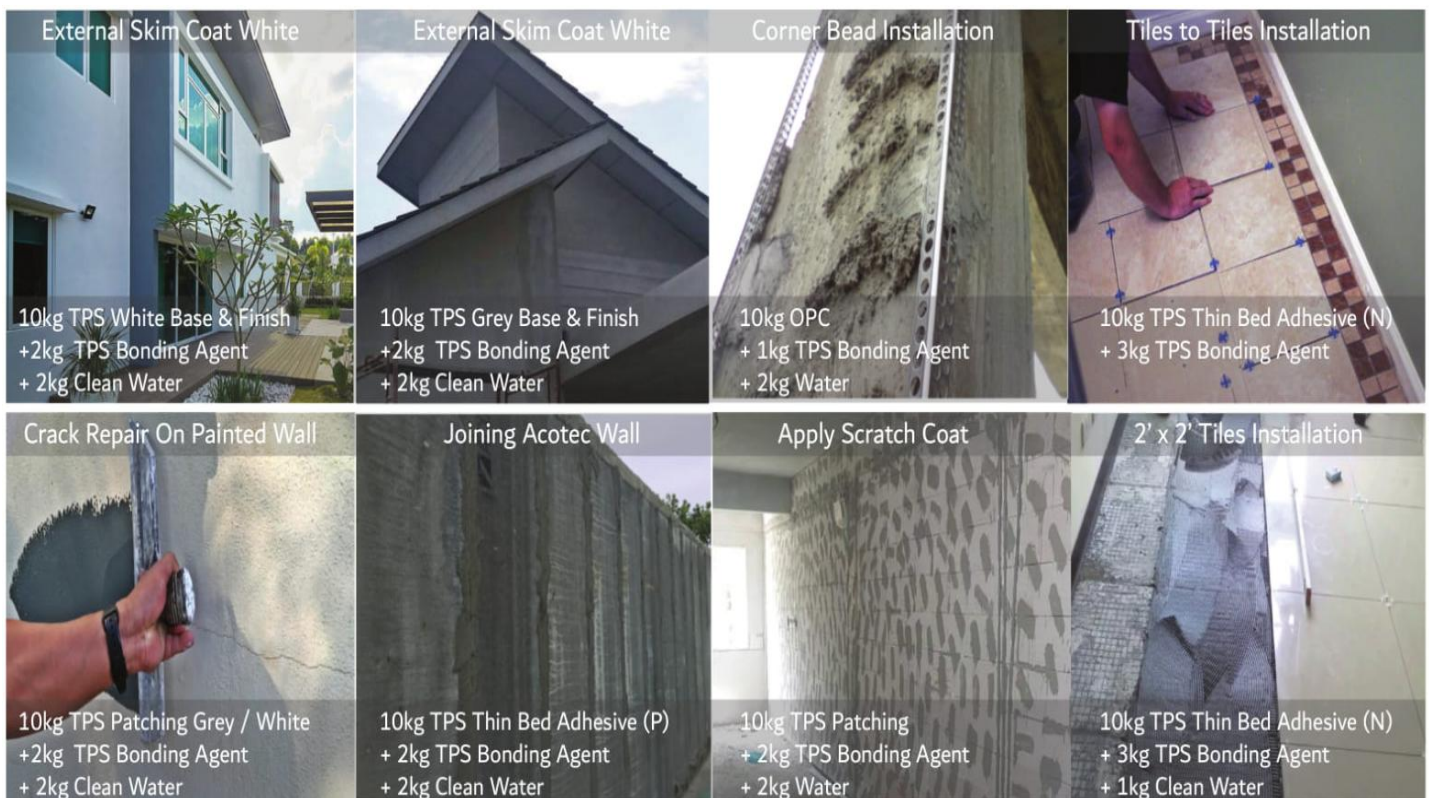
1. INTRODUCTION

TPS Bonding Agent Premium is a high quality styrene acrylic admixture and bonding agent designed to improve the adhesion and weather durability of concrete, masonry, stucco, terrazzo, tile adhesive, cement sand.

2. SUBSTRATE EXAMINATION

1. All surface must be clean, free from grease, oil, and loosely adhering particles.

3. MIXING





VIVO RAISER SDN. BHD. (920807-P)

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA

Phone: 04-4102148

Email: sales@shijiru.com



4. DISCLAIMER

This information relates only to the specific material designated and may not be valid for such material to be used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Vivo Raiser Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

Last Update:21/04/2025



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-022

SAFETY DATA SHEET

1. PRODUCT INFORMATION

General Product Name : **TPS Bonding Agent**
Product Description : **SBR-Based Latex**

2. COMPOSITION/INFORMATION ON INGREDIENTS

Name	HS code	Description
Styrene-Butadiene Rubber (SBR)	<u>40021100</u>	Latex-based admixture designed for integral adhesive for cement bond coats, mortars and concrete to improve bond strength and chemical resistance.

3. HAZARDS IDENTIFICATION

Classification of the hazardous chemical

Skin corrosion/irritation : Category 2
Serious eye damage/eye irritation : Category 1
Skin sensitisation : Category 1

Label elements

Hazard pictograms :



Signal word : **Danger**

Hazard statements : H315 Causes skin irritation.
H317 May cause an allergic skin reaction.
H318 Causes serious eye damage.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-022

Precautionary statements : **Prevention:**
P261 Avoid breathing dust.
P264 Wash skin thoroughly after handling.
P280 Wear protective gloves/ eye protection/ face protection.

Response:

P305 + P351 + P338 + P310 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.
P333 + P313 If skin irritation or rash occurs: Get medical advice/ attention.
P362 Take off contaminated clothing and wash before reuse.

Other hazards which do not result in classification

None known.

4. FIRST AID MEASURES

If irritation or other symptoms (as noted above) occur or persist from any route of exposure, remove the affected individual from the area and get medical aid.

EYES: Irrigate eyes with a heavy stream of water for at least 15 to 20 minutes. Occasionally lifting the upper and lower eyelids with fingers and roll eyes in circular motion. Get medical aid if needed.

SKIN: Wash exposed areas of the body with soap and water. Get medical aid if irritation develops or persists

INGESTION: Never give anything by mouth to an unconscious person. Get medical aid. Do not induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cups or milk or water.

Note to Physician: Treat symptomatically and supportively.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-022

5. FIRE FIGHTING MEASURES

Extinguishing Media

Dry chemical, foam, water, or extinguishing media appropriate for surrounding fire.

Unusual Fire and Explosion Hazards

Material poses no fire-related hazard.

Special hazards arising from the mixture

None known

Special Protective Equipment and Precautions for Firefighters

A SCBA is recommended to limit exposures to combustion products when fighting any fire.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment. Avoid breathing dust. Deny access to unprotected persons.

Environmental precautions : Do not flush into surface water or sanitary sewer system.

Methods and materials for containment and cleaning up : Pick up and arrange disposal without creating dust. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Handling:

Keep away from heat. Do not ingest. If ingested, seek medical advice immediately and show the container or the label. Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Avoid drinking, tasting, swallowing or ingesting this product. Provide eyewash fountains and safety showers in the work area.

Storage:

No special packaging required. Not classified as dangerous goods under the United Nations Transport Recommendations.

Page 3 of 8

ISSUE DATE: 1.12.2022



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-022

8. EXPOSURE CONTROL /PERSONAL PROTECTION

Engineering Controls:

Facilities storing or utilizing this materials should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low. Always provide effective general and when necessary local exhaust ventilation to draw spray, aerosol, fume, mist, and vapour away from workers to prevent routine inhalation.

RESPIRATORY PROTECTION:

In case of insufficient ventilation, wear suitable respiratory equipment

PERSONAL PROTECTIVE EQUIPMENT EYES:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

OTHER PROTECTIVE MEASURES:

Employees must practice good personal hygiene, washing exposed areas of skin several times daily and laundering contaminated clothing before re-use.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Liquid

Appearance: Whitish

Odour: Odourless

PH @ 1.0% H₂O: 5.0 – 11.0

Vapour Pressure: Not available.

Vapour Density, Not available.

Boiling Point: Not available.

Freezing/ Melting Point: Not available.

Decomposition Temperature: Not available.

Volatiles, % by weight: Not available.

Specific Gravity (H₂O=1): Not available.

Solubility in H₂O, % by Volume: Soluble

Evaporation Rate: Not available.

Viscosity: Not available.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-022

10. STABILITY AND REACTIVITY

GENERAL: This product is stable.

CONDITIONS TO AVOID: Incompatible materials, dust generation, excess heat

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID: Strong oxidizing agents HAZARDOUS

DECOMPOSITION PRODUCTS: Combustion produces carbon monoxide, carbon dioxide.

HAZARDOUS POLYMERIZATION: Has not been reported.

11. Toxicological Information

Potential Health Effects:

CAUTION! Repeated inhalation of dust can cause sensitization to susceptible individuals & may cause eye irritation. Pre-existing skin problem may be aggravated by prolonged or repeated contact.

INHALATION: Dust inhalation may cause coughing, mucous production and shortness of breath.

EYE CONTACT: Direct contact may cause irritation.

SKIN CONTACT: Prolonged or repeated contact is no expected to create acute health effects.

INGESTION: No ingestion effect known.

Chronic health effects: None known

Symptoms / Sign of exposure: Irritation

Routes of exposure: Eye contact, Inhalation

Carcinogenic status: The components of this mixture are not known to be listed or regulated by IARC, NTP, OSHA, ACGIH.

As with all chemicals for which test data are limited or non-exist, caution must be exercised through the prudent use of protective equipment and handling procedure to minimise exposure.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-022

12. Ecological Information

Ecotoxicity

No data available

Persistence and degradability

No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : Send to a licensed waste management company.

Contaminated packaging : Empty remaining contents. Dispose of as unused product.
Do not re-use empty containers.

14. TRANSPORT INFORMATION

International Regulations

UNRTDG

UN number : Not applicable
Proper shipping name : Not applicable
Class : Not applicable
Subsidiary risk : Not applicable
Packing group : Not applicable
Labels : Not applicable
Environmentally hazardous : no



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-022

IATA-DGR

UN/ID No. : Not applicable
Proper shipping name : Not applicable
Class : Not applicable

Subsidiary risk : Not applicable
Packing group : Not applicable
Labels : Not applicable
Packing instruction (cargo aircraft) : Not applicable
Packing instruction (passenger aircraft) : Not applicable

IMDG-Code

UN number : Not applicable
Proper shipping name : Not applicable
Class : Not applicable
Subsidiary risk : Not applicable
Packing group : Not applicable
Labels : Not applicable
EmS Code : Not applicable
Marine pollutant : Not applicable

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied. No special precautions are needed apart from those mentioned under heading 8.

15. REGULATORY INFORMATION:

Safety, health, and environmental regulations specific for the hazardous chemical

Occupational Safety and Health (Classification, Labelling and Safety Data Sheet of Hazardous Chemicals) Regulations 2013.

Occupational Safety and Health (Use and Standards of Exposure of Chemicals Hazardous to Health) Regulations 2000.

International Chemical Weapons Convention (CWC)

Schedules of Toxic Chemicals and Precursors: Not applicable

Page 7 of 8

ISSUE DATE: 1.12.2022



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-022

16. OTHER INFORMATION:

SDS Prepared by: Vivo Raiser Sdn Bhd

Phone Number: +6044102148

Date of Preparation: 1 January 2017

Revision indicators and Date

Effective Date Change: 9 May 2018 Supersedes: 5 May 2018

Format Changes: Conforms to OSHA 29CFR 1910.1200 (HCS)

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parents companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

TEST REPORT

REPORT NO : 2017CB0167	PAGE : 1 OF 3
This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.	

Applicant : VIVO RAISER SDN BHD
No: 9 & 10, Jalan PKNK 3/7,
Kawasan Perusahaan Sungai Petani,
08000 Sungai Petani
Kedah Darul Aman

Manufacturer : T & G MARKETING ENTERPRISE
No: 23 & 25, Laluan Industri Lahat 1,
Kawasan Perusahaan RIMA,
31500 Ipoh
Perak Darul Ridzuan

Product : Waterproof (P) & Bonding Agent (P)

Reference Standard/ Method of test : 1) BS EN 1542: 1999
Products and systems for the protection and repair of concrete structures
– Test methods – Measurement of bond strength by pull-off
2) BS EN 13294: 2002
Products and systems for the protection and repair of concrete structures
– Test methods – Determination of stiffening time
3) BS EN 1015-3: 1999
Methods of test for mortar for masonry – Part 3: Determination of consistence of fresh mortar (by flow table)

Description of sample : One (1) bottle of 5 litre Waterproof (P) & Bonding Agent (P) and one (1) bag of 20 kg cement were received for testing.
Model: TPS Waterproof (Premium) & TPS Bonding Agent (Premium)
Brand : TPS


Date Received of Complete Application : 6th October 2016

Job no./Ref. no. : J20161431326/SQAS/CCST/T.REC/CSL/01

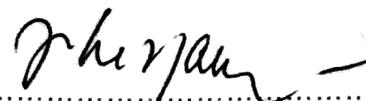
Description of test results : The test results of the submitted test samples are described in Page 2 & 3 of this test report.

Issued date : 08 FEB 2017

Approved Signatory



(HANON NAZIR MOHD BASIR)
Senior Testing Executive

(Y.M. RAJA NOR SIHA RAJA ABD. HANAN)
Head
Civil & Construction Section
Testing Services Department

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.

TEST RESULTS:

Product : Waterproof (P) & Bonding Agent (P)
 Model : Waterproof (Premium) & TPS Bonding Agent (Premium)
 Mix proportion : 20 kg cement: 5 litre Waterproof (P) & Bonding Agent (P)
 Method of Test : BS EN 1542: 1999,
 Products and systems for the protection and repair of concrete structures –
 Test methods – Measurement of bond strength by pull-off

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Determination of bond strength by pull-off	<u>Adhesion Strength</u> 1) 0.62 N/mm ² 2) 0.59 N/mm ² 3) 0.58 N/mm ² 4) 0.64 N/mm ² 5) 0.62 N/mm ² Mean: 0.61 N/mm²

(The remainder of this page is intentionally left blank)

08 FEB 2017



This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating to the Use of Test Report.


TEST RESULTS:

Product : Waterproof (P) & Bonding Agent (P)
 Model : Waterproof (Premium) & TPS Bonding Agent (Premium)
 Mix proportion : 20 kg cement: 5 litre Waterproof (P) & Bonding Agent (P)
 Method of Test : 1) BS EN 13294: 2002
 Products and systems for the protection and repair of concrete structures –
 Test methods – Determination of stiffening time
 2) BS EN 1015-3: 1999,
 Methods of test for mortar for masonry – Part 3: Determination of
 consistence of fresh mortar (by flow table)

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Determination of stiffening time	<u>Stiffening Time</u> More than 8 hours to stiff
2.	Determination of consistence of fresh mortar (by flow table)	<u>Flow value</u> 1) 27.4 % 2) 27.8 % Mean: 27.6 %

(The remainder of this page is intentionally left blank)

08 FEB 2017





The Singapore Environment Council hereby grant

Vivo Raiser Sdn Bhd

No 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani
Sungai Petani 08000, Kedah, Malaysia

the right to use the Singapore Green Label for

TPS ADHESIVE SERIES

022-145-3462

Environmentally Preferred Cement / Concrete Product

(In accordance to SEC Green Label Category 22: Cement and Concrete Products)

Validity: 5 June 2025 to 2 July 2026

Cheang Kok Chung
Executive Director



Certificate of Registration



This is to certify that the Environmental Management System of

VIVO RAISER SDN. BHD.

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

ISO 14001:2015
(Environmental Management System)

SCOPE

**Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and
Cementitious Waterproofing**

(IAF Code: 12)

Certificate Number : 180325026036

Initial Registration Date : 18-Mar-2025

1st Surveillance Date : 18-Feb-2026

Next Due Date : 17-Mar-2026

Certificate Expiry Date : 17-Mar-2028

To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited


Managing Director



CB-MS-3926



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com

Certificate of Registration



This is to certify that the Occupational Health and Safety Management System of

VIVO RAISER SDN. BHD.

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

ISO 45001:2018

(Occupational Health and Safety Management System)

SCOPE

Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and
Cementitious Waterproofing

(IAF Code: 12)

Certificate Number : 270225036005

Initial Registration Date : 27-Feb-2025

st Surveillance Date : 27-Jan-2026

Next Due Date : 26-Feb-2026

Certificate Expiry Date : 26-Feb-2028

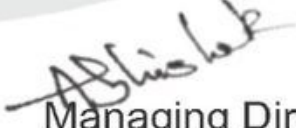
To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited


Managing Director



CB-MS-3919



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com

Certificate of Registration



This is to certify that the Quality Management System of

VIVO RAISER SDN. BHD.

SHIJIRU SDN. BHD.

HQ: No. 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani, 08000 Sungai Petani, Kedah Darul Aman, Malaysia.

Branch: No 27 & 29, Laluan Industri Lahat 1, Kawasan Perindustrian Lahat, 31450 Ipoh, Perak, Malaysia.

is in accordance with the requirements of the following standard

ISO 9001:2015

(Quality Management System)

SCOPE

Supply of Materials and Labour for Plastering, Skim Coating and Plasterboard Ceiling and Manufacture for Plaster Additive, Skim Coat, Render, Tile-Adhesive and Cementitious Waterproofing Chemical

(IAF Code: 29,35,12)

Certificate Number : 111125016018

Initial Registration Date : 11-Nov-2025

1st Surveillance Date : 10-Oct-2026

Next Due Date : 10-Nov-2026

Certificate Expiry Date : 10-Nov-2028

To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited

Abhishek
Managing Director



CB-MS-3923



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com