

# TPS CRACK SEALER PRO SERIES

REPAIR FOR INTERNAL & EXTERNAL HAIRLINE & MOVABLE CRACK




## TECHNICAL DATA

<b>Packing</b>	<input type="checkbox"/> 1Kg <input type="checkbox"/> 5Kg <input type="checkbox"/> 20Kg
<b>Binder</b>	PU & Styrene Acrylic Copolymer
<b>Thickness</b>	1-2mm Per Coat
<b>Coverage (2 coats)</b>	On rough surface: 1.4m <sup>2</sup> /kg On smooth surface: 2.7m <sup>2</sup> /kg
<b>Item Code</b>	1Kg TPS G05A 5Kg TPS G05 20Kg TPS G05B




**Window / Door Frame Hairline Crack**

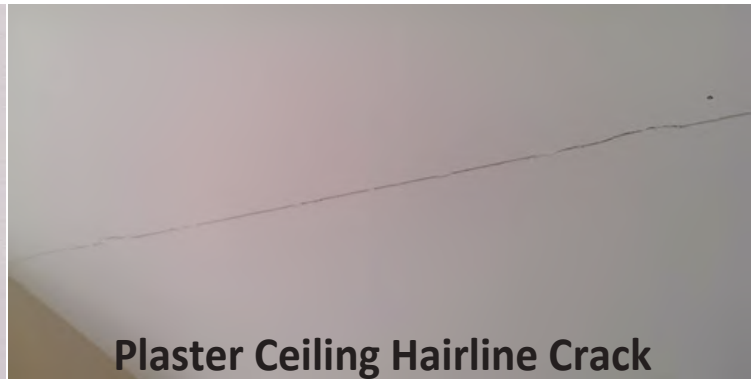

**Plaster Ceiling Hairline Crack**



**Concrete Hairline Crack**

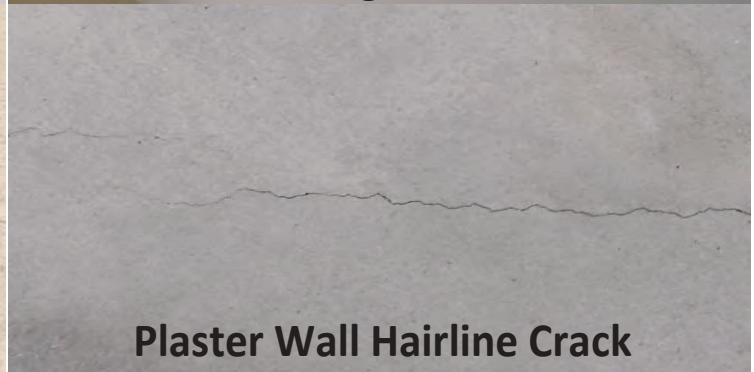

**Plaster Wall Hairline Crack**

FOR CRACK MORE THAN 1MM, PATCH UP WITH TPS SKIM COAT PREMIUM OR TPS PATCHING WHITE WATERPROOF BEFORE APPLY TPS CRACK SEALER.



HOW TO USE



TECHNICAL DATA



VALUED CUSTOMER

