


# TPS SKIM COAT GREY ECO SERIES

SKIM COAT FOR IBS WALL, PLASTERED WALL & HOLLOW BLOCK

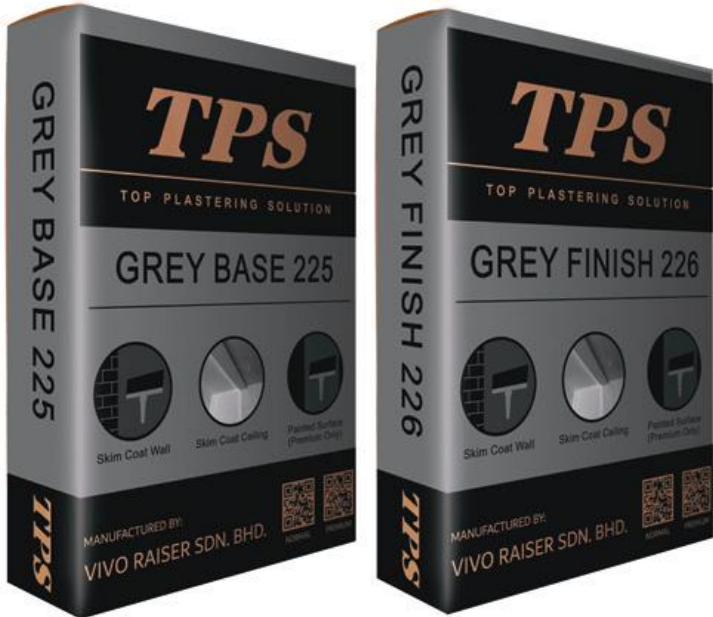

## TECHNICAL DATA

Packing	40Kg
Colour	GREY
Mixing Ratio	20Kg Base + 7kg Clean Water 20Kg Finish + 10kg Clean Water
Coverage (Approx)	Base: 14m <sup>2</sup> at 1mm thickness Finish: 60m <sup>2</sup> at 0.5mm thickness
Grade	  
Item Code	225 Base     D01 226 Finish    D02
Thickness (Approx Per Coat)	Base: 1-3mm Finish: 0.5-1.5mm
Surface Thickness	Recommendation: Less than 5mm     TPS Skim Coat 5 - 12mm            TPS Render Grey + TPS Skim Coat 12 - 20mm            Cement Sand Plaster TPS Skim Coat

## APPLICATION



Apply base coat to patch up undulating formwork joints & small holes. Apply finish coat to smoothen and level the surface.

 Do Not Apply On Painted Surface Without TPS Bonding Agent

VALUED CUSTOMER



HOW TO USE

华语



EN



TECHNICAL DATA

GREY BASE

GREY FINISH





# TECHNICAL DATA SHEET

## TPS GREY FINISH 226 PREMIUM

### PRODUCT DESCRIPTION

TPS Grey Finish 226 (Premium) is a high quality cement-based and water resistant skim coat. It is specially formulated as a polymer modified finishing coat.

### USES

Application as finishing coat on concrete substrate, hollow block & bricks, precast unit & most of the cement substrates.

### ADVANTAGES

- ✓ Good crack bridging capability
- ✓ Mixes and applies easily
- ✓ Very good adhesion to substrates
- ✓ High compressive strength
- ✓ Non-toxic, same as cement
- ✓ Improve productivity
- ✓ Non chalky / powdery finishes

### PRODUCT DATA

Form	: Powder
Appearance / Colours	: GREY
Packaging	: 40 kg
Storage Conditions / Shelf Life	: 6 months from the date of production if stored properly in original, unopened and undamaged sealed packaging, in cool, dry conditions. Keep away from direct sunlight.

### TECHNICAL DATA

Binder	: Ordinary Portland Cement
Filler	: Graded Silica Sand / Limestone powder
Dry Bulk Density	: 1240kg/m <sup>3</sup>
Flexural Strength	: 2.3 N/mm <sup>2</sup>
Aggregate Size	: 0.5-1mm
Adhesion Strength	: 0.90 N/mm <sup>2</sup>
Compressive Strength (28 Days)	: 6.9 N/mm <sup>2</sup>
Air Content	: 11%
Coefficient of capillary water absorption	: Min. 0.5 kg/m <sup>2</sup>
Recommended Thickness	: Max 1mm

### HEALTH AND SAFETY INFORMATION

For information and advice on the safe handling, storage, and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet (available upon request) containing physical, ecological toxicological and other safety-related data



### SYSTEM INFORMATION

Application Details	: 20kg TPS Grey Finish 226 (Premium) + 10kg clean water
Mixing ratio	: 10kg clean water
Coverage (According to mixing ratio above)	: 90m <sup>2</sup> at 0.5mm thickness
Substrate Preparation	: Concrete or plaster surfaces must be clean, free from grease, oil and loosely adhering particles.

### APPLICATION INSTRUCTIONS

Application Method / Tools	: Refer Method Statement.
Cleaning of Tools	: Clean all tools and application equipment with water immediately after use.
Pot Life (maximum)	: 180 ~ 240 minutes (at room temperature). Pot life is shorter at higher temperatures.

### LEGAL NOTES

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

**VIVO RAISER SDN. BHD. (920807-P)**

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA

Phone: 04-4102148 Email: sales@shijiru.com Website: www.shijiru.com



ISO 9001:2015



SIRIM QAS International Sdn. Bhd.  
(Company No.: 199601037981 (410334-X))  
No.1, Persiaran Dato' Menteri, P.O.BOX 7035, Section 2,  
40700 Shah Alam, Selangor Darul Ehsan, Malaysia  
Tel: 03-55445872  
Fax: 03-55445886  
www.sirim-qas.com.my

### TEST REPORT

REPORT NO : 2020CB0775

PAGE : 1 OF 5

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

### THIS TEST REPORT IS ISSUED IN SECURED PDF SOFTCOPY

Applicant : VIVO RAISER SDN BHD  
No: 9 & 10, Jalan PKNK 3/7,  
Kawasan Perusahaan Sungai Petani,  
08000 Sungai Petani,  
Kedah.

Manufacturer : VIVO RAISER SDN BHD

Product : Plastering Mortar (Grey Finish)

Reference Standard / Method of Test : 1) ASTM C348-14, Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars  
2) ASTM C349-08, Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using Portions of Prism Broken in Flexure)  
3) ASTM D7234-12, Standard Test Method for Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers

Description of sample : One (1) bag of 10 kg Plastering Mortar (Grey Finish) was received for testing.  
Brand: TPS  
Model: Grey Finish  
Product Description: High quality cement-based and water resistant skim coat. It is specially formulated as a polymer modified finishing coat.

Date Received of Complete Application : 18 September 2020

Job No. : J20201430555

Description of Test Results : The test results of the submitted test sample are described in Page 2, 3, & 4 of this test report.

Issued Date : 10 December 2020

Approved Signatory;

(HANON NAZIR BIN MOHD BASOR)  
Senior Testing Executive



*(Handwritten Signature)*

(NOR SIHA BINTI RAJA ABDUL HANAN)  
Head  
Civil & Construction Section  
Testing Services Department

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

**TEST RESULTS:**

Product : Plastering Mortar (Grey Finish)  
 Mix ratio : 50 % of water  
 Method of test : ASTM C348-14,  
 Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars.

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Determination of Flexural Strength	<u>28 days</u> 1) 2.1 N/mm <sup>2</sup> 2) 2.0 N/mm <sup>2</sup> 3) 2.5 N/mm <sup>2</sup> Mean: (2.2 ± 0.08*) N/mm <sup>2</sup>

## Note:

- 1) Testing period – 12<sup>th</sup> October 2020 to 27<sup>th</sup> November 2020.
- 2) Where the reported uncertainty is calculated using a coverage factor  $k=2$ , which gives a level of confidence of approximately 95%.
- 3) \*Denotes measurement uncertainty

(The remainder of this page is intentionally left blank)



--	--	--

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

**TEST RESULTS:**

Product : Plastering Mortar (Grey Finish)  
 Mix ratio : 50 % of water  
 Method of test : ASTM C349-08,  
 Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using Portions of Prism Broken in Flexure)

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Determination of Compressive Strength	<u>28 days</u> 1) 6.6 N/mm <sup>2</sup> 2) 7.8 N/mm <sup>2</sup> 3) 7.0 N/mm <sup>2</sup> 4) 6.8 N/mm <sup>2</sup> 5) 7.1 N/mm <sup>2</sup> 6) 6.1 N/mm <sup>2</sup> Mean: (6.9 ± 0.23*) N/mm <sup>2</sup>

## Note:

- 1) Testing period – 12<sup>th</sup> October 2020 to 27<sup>th</sup> November 2020.
- 2) Where the reported uncertainty is calculated using a coverage factor  $k=2$ , which gives a level of confidence of approximately 95%.
- 3) \*Denotes measurement uncertainty

(The remainder of this page is intentionally left blank)



--	--	--

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

#### CONDITIONS RELATING TO THE USE OF SIRIM QAS INTERNATIONAL TEST REPORT

1. A Test Report will be issued in respect of Testing Services conducted and shall relate only to the sample actually tested. SIRIM QAS International makes no warranty whatsoever and the Applicant shall not represent in any manner that any duplication or mass production of the Product is same as the sample actually tested or that SIRIM QAS International has tested any of the duplicated or mass-produced Product. Measurement uncertainty shall be included in the Test Report when there is no statement of conformity required. When a statement of conformity to a specification or standard is applied, the Simple Acceptance Rule is used. Unless otherwise stated, the Acceptance Rule with Guard Band is used.
2. The Test Report shall not be misused, amended, changed, varied or modified in any manner whatsoever by the Applicant or otherwise.
3. If the Test Report is to be furnished to any third party or to the public, each such Test Report shall be furnished in full, legible and in its entirety.
4. The Test Report shall not be reproduced and shall not in any event be used for any advertising purposes or whatsoever without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE) of SIRIM QAS International of No 1, Persiaran Dato' Menteri, Building 8, Section 2, P.O. Box 7035, 40700 Shah Alam, Selangor Darul Ehsan.
5. Customer (Applicant/Manufacture/Factory,etc.) is not permitted to use any SIRIM QAS International, SIRIM or other SIRIM's subsidiaries logo or words on packaging, sample's manual, technical specification, items and products.
6. Subject to consent and written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE) of SIRIM QAS International, the customer (Applicant/Manufacture/Factory,etc.) may use SIRIM QAS International logo or word on the promotional materials and the Applicant shall only include the phrase, "A sample of this product has been tested by SIRIM QAS International ...(Test Report No) ...(dated) ...(for what test) ...(to which standard)" or such similar words which stress that only the sample was actually tested. This phrase shall only be used for the purpose of product advertisement or product promotion (eg; brochures/flyers/official website). For avoidance of doubt, the statement shall not be used on the sample, packaging of the sample, items and products.
7. In the event there is an investigation from a Government Regulatory Agency concerning the Applicant's Test Report, SIRIM QAS International may disclose the information pertaining to the Test Report for purposes of such investigation.
8. Further or in the alternative, it is strictly forbidden unless with prior written approval from the Chief Executive Officer of SIRIM QAS International, to represent in any manner whatsoever that SIRIM QAS International, SIRIM and/or other SIRIM's subsidiaries has endorsed, approved or validated the Product of the Applicant in any manner whatsoever.
9. In the event the Applicant is found in breach of this provision, SIRIM QAS International, SIRIM and/or other SIRIM's subsidiaries without prejudice to any other rights and remedies may take whatever action necessary including but not limited to:
  - a) Informing and placing a notice in the media;
  - b) Obtaining an injunction from Court (cost on a solicitor-client basis to be borne by the Applicant);
  - c) Refusing to accept any further Product for Testing Services from the Applicant or whosoever related to the Applicant, whether subsidiary or otherwise;
  - d) Instructing the Applicant to withdraw and recall the advertisement, statement or document in question and advertise a clarification and apology to SIRIM QAS International, SIRIM and/or other SIRIM's subsidiaries twice in a national publication of SIRIM QAS International's choice at the Applicant's sole cost; and
  - e) Informing or lodging a report pertaining the Applicant's Test Report with the relevant authorities.
10. SIRIM QAS International is committed in supporting an environmentally-friendly business practices by reducing paper consumption, therefore we do not issue any hard copy of Test Report to the Applicant. However, additional certified true copy(ies) or softcopy of the Test Report may be issued upon request by the Applicant upon payment of the relevant fee. The certified true copy(ies) or softcopy of test report shall only be given for test report issued not more than three (3) years from the date of issuance.
11. Issuance of Amendment Report due to the following reasons are chargeable to the Applicant :
  - a) Changes in details of the Applicant name and/or address;
  - b) Changes in details of the Manufacturer's name and/or address;
  - c) Changes in details of the Factory location name and/or address;
  - d) Changes in details of the model and/or type designation
12. However, issuance of Supplementary Report due to the following reasons are FOC :
  - a) Misprints and typo errors;
  - b) Missing technical information as agreed in PP1 form;
  - c) Test data not reported;
  - d) Mistake in reporting of test data
13. Corrections to report shall only be allowed if the date of issuance of the original report has not exceeded 6 months and shall be limited to a maximum 3 times, after either case whichever occurs earlier, an Amendment or a Supplementary Report shall not be issued.

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

**TEST RESULTS:**

Product : Plastering Mortar (Grey Finish)  
 Mix ratio : 50 % of water  
 Method of Test : ASTM D7234-12,  
 Standard Test Method for Pull-Off Adhesion Strength of Coatings on  
 Concrete Using Portable Pull-Off Adhesion Testers

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Measurement of bond strength by Pull-Off Using Portable Adhesion Tester between concrete substrate and Plastering Mortar (Grey Finish)	<u>Pull-off Adhesion Strength</u> 1) 0.77 N/mm <sup>2</sup> 2) 0.96 N/mm <sup>2</sup> 3) 0.95 N/mm <sup>2</sup> 4) 0.87 N/mm <sup>2</sup> 5) 0.93 N/mm <sup>2</sup> Mean: (0.90 ± 0.03*) N/mm <sup>2</sup>  <u>Mode of failure (Fracture pattern)</u>  Cohesive failure in the Plastering Mortar (Grey Finish)

## Note:

- 1) Testing period – 12<sup>th</sup> October 2020 to 27<sup>th</sup> November 2020.
- 2) Where the reported uncertainty is calculated using a coverage factor k=2, which gives a level of confidence of approximately 95%.
- 3) \*Denotes measurement uncertainty

(The remainder of this page is intentionally left blank)



--	--	--



The Singapore Environment Council hereby grant

## **Vivo Raiser Sdn Bhd**

No 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani  
Sungai Petani 08000, Kedah, Malaysia

the right to use the Singapore Green Label for

**TPS FINISH SERIES**

022-145-3321

**Environmentally Preferred Cement / Concrete Product**

(In accordance to SEC Green Label Category 22: Cement and Concrete Products)

Validity: 5 June 2025 to 26 November 2026

---

Cheang Kok Chung  
Executive Director



**Singapore  
Environment  
Council**



1 Kay Siang Road #07-01  
Singapore 248922



**VIVO RAISER SDN. BHD.** (920807-P)  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
Phone: 04-4102148      Email: [sales@shijiru.com](mailto:sales@shijiru.com)



# **METHOD STATEMENT FOR TPS GREY FINISH**

## **1. INTRODUCTION**

TPS Grey Finish is a high quality cement-based and water resistant skim coat. It is specially formulated as a polymer modified finishing coat.

## **2. SUBSTRATE EXAMINATION**

Before carrying out skim coat finishing works, ensure that: -

- Concrete or base surfaces must be clean, free from grease, oil and loosely adhering particles.
- Wetting of high absorbing substrates is recommended if the substrate is too dry before the application of TPS Grey Finish



#### **4. APPLICATION**

- a. Mix 40kg of TPS Grey Finish with 20litres of clean water until a desired homogeneous paste is achieved. Additional water can be added if required.
- b. Ensure the mix is free from lump before use.
- c. A resting time of 3 minutes is recommended for best consistency.
- d. TPS Grey Finish mortar is applied using a steel trowel or spatula. As good practice, a maximum thickness of 1mm is recommended (2-3 coats).

#### **5. REMARK**

- TPS Grey Finish should be stored in a cool and dry place and away from excessive moisture.
- TPS Grey Finish is suitable for interior use only. It can also be used to patch up / re-plaster on painted surface.

#### **6. DISCLAIMER**

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

Last Update: 21/04/2025



**VIVO RAISER SDN. BHD.** (920807-P)  
 9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
 08000 SUNGAI PETANI, KEDAH, MALAYSIA  
 Phone: 04-4102148 Email: [sales@shijiru.com](mailto:sales@shijiru.com)



VR2022-012

## SAFETY DATA SHEET

### 1. PRODUCT & COMPANY INFORMATION

General Product Name : **TPS Grey Finish/TPS White Finish**  
 Product Description : **Cement-based product formulated for thin plaster on concrete and block wall.**

**Shijiru Sdn Bhd**

9 & 10, Jln PKNK, Kawasan Perusahaan Sungai Petani  
 08000 Sungai Petani, Kedah, Malaysia  
 Contact Numbers: +60124093200, +60124947600  
 Website: [www.shijiru.com](http://www.shijiru.com)

### 2. COMPOSITION/INFORMATION ON INGREDIENTS

Name	CAS #	Description
Colored Composite Cement	65997-15-1	A preparation of cementitious mix based on a significant portion of portland cement or white cement, graded limestone powders, graded sand and other chemicals. Detail information on content is confidential.

### 3. HAZARDS IDENTIFICATION

**United States (US)**

According to OSHA 29CFR 1910.1200 (HCS)

**GHS Classification of the substance or mixture**

Not classified

**GHS Label Elements**

Pictogram None  
 Signal Word None  
 Hazard Statements None

**Precautionary Statements**

**Prevention**

Use engineering controls and wet methods to minimize dust.



### Response

If in eyes, rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if exposed or concerned.

### Storage

Keep dry to preserve usefulness.

### Disposal

Dispose of material in accordance with federal, state, and local regulations.

---

## 4. FIRST AID MEASURES

If irritation or other symptoms (as noted above) occur or persist from any route of exposure, remove the affected individual from the area and get medical aid.

**EYES:** Irrigate eyes with a heavy stream of water for at least 15 to 20 minutes. Occasionally lifting the upper and lower eyelids with fingers and roll eyes in circular motion. Get medical aid if needed.

**SKIN:** Wash exposed areas of the body with soap and water. Get medical aid if irritation develops or persists

**INHALATION:** Remove from area of exposure and move to fresh air immediately; seek medical attention if symptoms persist.

**INGESTION:** Never give anything by mouth to an unconscious person. Get medical aid. Do not induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cups or milk or water.

**Note to Physician:** Treat symptomatically and supportively.

---

## 5. FIRE FIGHTING MEASURES

### Extinguishing Media

Dry chemical, foam, water, or extinguishing media appropriate for surrounding fire.

### Unusual Fire and Explosion Hazards

Material poses no fire-related hazard.

### Special hazards arising from the mixture

None known

### Special Protective Equipment and Precautions for Firefighters

A SCBA is recommended to limit exposures to combustion products when fighting any fire.



---

## 6. ACCIDENTAL RELEASE MEASURES

### **Personal precautions, protective equipment and emergency procedures**

No special precautions required. General recommendations: Wear appropriate Personal Protective Equipment. (See Section 8)

### **Environmental precautions**

This product does not present an ecological hazard to the environment. Dispose of in accordance with applicable federal, state, and local regulations.

### **Methods and materials for containment and cleaning up**

No specific clean-up procedures necessary. Pick up unused product to prevent tripping hazard

---

## 7. HANDLING AND STORAGE

### **Handling:**

Keep away from heat. Do not ingest. If ingested, seek medical advice immediately and show the container or the label. Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Avoid drinking, tasting, swallowing or ingesting this product. Provide eyewash fountains and safety showers in the work area.

### **Storage:**

No special packaging required. Not classified as dangerous goods under the United Nations Transport Recommendations.

---

## 8. EXPOSURE CONTROL /PERSONAL PROTECTION

### **Engineering Controls:**

Facilities storing or utilizing this materials should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low. Always provide effective general and when necessary local exhaust ventilation to draw spray, aerosol, fume, mist, and vapour away from workers to prevent routine inhalation.

### **RESPIRATORY PROTECTION:**

In case of insufficient ventilation, wear suitable respiratory equipment

### **PERSONAL PROTECTIVE EQUIPMENT EYES:**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.



**OTHER PROTECTIVE MEASURES:**

Employees must practice good personal hygiene, washing exposed areas of skin several times daily and laundering contaminated clothing before re-use.

---

**9. PHYSICAL AND CHEMICAL PROPERTIES**

**Physical State:** Powder  
**Appearance:** Grey/White  
**Odour:** Odourless  
**PH @ 1.0% H<sub>2</sub>O:** 6.0 – 8.0  
**Vapour Pressure:** Not available.  
**Vapour Density,** Not available.  
**Boiling Point:** Not available.  
**Freezing/ Melting Point:** Not available.  
**Decomposition Temperature:** Not available.  
**Volatiles, % by weight:** Not available.  
**Specific Gravity (H<sub>2</sub>O=1):** Not available.  
**Solubility in H<sub>2</sub>O, % by Volume:** Soluble  
**Evaporation Rate:** Not available.  
**Viscosity:** Not available.

---

**10. STABILITY AND REACTIVITY**

**GENERAL:** This product is stable.

**CONDITIONS TO AVOID:** Incompatible materials, dust generation, excess heat

**INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:** Strong oxidizing agents HAZARDOUS

**DECOMPOSITION PRODUCTS:** Combustion produces carbon monoxide, carbon dioxide.

**HAZARDOUS POLYMERIZATION:** Has not been reported.

---

**11. Toxicological Information**

**Potential Health Effects:**

CAUTION! Repeated inhalation of dust can cause sensitization to susceptible individuals & may cause eye irritation. Pre-existing skin problem may be aggravated by prolonged or repeated contact.

**INHALATION:** Dust inhalation may cause coughing, mucous production and shortness of breath.

**EYE CONTACT:** Direct contact may cause irritation.



**VIVO RAISER SDN. BHD.** (920807-P)  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
Phone: 04-4102148      Email: [sales@shijiru.com](mailto:sales@shijiru.com)



VR2022-012

**SKIN CONTACT:** Prolonged or repeated contact is no expected to create acute health effects.

**INGESTION:** No ingestion effect known.

**Chronic health effects:** None known

**Symptoms / Sign of exposure:** Irritation

**Routes of exposure:** Eye contact, Inhalation

**Carcinogenic status:** The components of this mixture are not known to be listed or regulated by IARC, NTP, OSHA, ACGIH.

As with all chemicals for which test data are limited or non-exist, caution must be exercised through the prudent use of protective equipment and handling procedure to minimise exposure.

---

## 12. Ecological Information

This product is biodegradable.

---

## 13. DISPOSAL CONSIDERATIONS

Incinerate or landfill waste a properly permitted facility in accordance with local regulations. Land disposal should be in closed containers.

**US RQ:** Not applicable

---

## 14. TRANSPORT INFORMATION

**Cement Additives is not covered by the international regulation on the transport of dangerous goods (IMDG, IATA, ADR/RID) and no classification is required.**

No special precautions are needed apart from those mentioned under heading 8.

---

## 15. REGULATORY INFORMATION:

European/International Regulations  
European Labelling in Accordance with EC Directives  
Hazard Symbols: N/A  
Risk Phrases:  
Safety Phrases:



**VIVO RAISER SDN. BHD.** (920807-P)  
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI  
08000 SUNGAI PETANI, KEDAH, MALAYSIA  
Phone: 04-4102148      Email: [sales@shijiru.com](mailto:sales@shijiru.com)



VR2022-012

---

## 16. OTHER INFORMATION:

SDS Prepared by: Vivo Raiser Sdn Bhd

Phone Number: +6044102148

Date of Preparation: 1 December 2022

Revision indicators and Date

Effective Date Change: 1 December 2022 Supersedes: 5 May 2018

Format Changes: Conforms to OSHA 29CFR 1910.1200 (HCS)

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parents companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

# Certificate of Registration



This is to certify that the Occupational Health and Safety Management System of

**VIVO RAISER SDN. BHD.**

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

**ISO 45001:2018**

(Occupational Health and Safety Management System)

## SCOPE

Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and  
Cementitious Waterproofing

(IAF Code: 12)

Certificate Number : 270225036005

Initial Registration Date : 27-Feb-2025

<sup>st</sup> Surveillance Date : 27-Jan-2026

Next Due Date : 26-Feb-2026

Certificate Expiry Date : 26-Feb-2028

**To verify certificate, visit at :**

[www.arscert.com](http://www.arscert.com)

[www.uafaccreditation.org](http://www.uafaccreditation.org)

[www.iafcertsearch.org](http://www.iafcertsearch.org)

Issued by ARS Assessment Private Limited

*Abhishek*  
Managing Director



CB-MS-3919



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on [info@arscert.com](mailto:info@arscert.com)

# Certificate of Registration



This is to certify that the Quality Management System of

**VIVO RAISER SDN. BHD.**

**SHIJIRU SDN. BHD.**

HQ: No. 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani, 08000 Sungai Petani, Kedah Darul Aman, Malaysia.

Branch: No 27 & 29, Laluan Industri Lahat 1, Kawasan Perindustrian Lahat, 31450 Ipoh, Perak, Malaysia.

is in accordance with the requirements of the following standard

## ISO 9001:2015

(Quality Management System)

### SCOPE

Supply of Materials and Labour for Plastering, Skim Coating and Plasterboard Ceiling and Manufacture for Plaster Additive, Skim Coat, Render, Tile-Adhesive and Cementitious Waterproofing Chemical

(IAF Code: 29,35,12)

Certificate Number : 111125016018

Initial Registration Date : 11-Nov-2025

1<sup>st</sup> Surveillance Date : 10-Oct-2026

Next Due Date : 10-Nov-2026

Certificate Expiry Date : 10-Nov-2028

**To verify certificate, visit at :**

[www.arscert.com](http://www.arscert.com)

[www.uafaccreditation.org](http://www.uafaccreditation.org)

[www.iafcertsearch.org](http://www.iafcertsearch.org)

Issued by ARS Assessment Private Limited

*Abhishek*  
Managing Director



CB-MS-3923



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on [info@arscert.com](mailto:info@arscert.com)

# CERTIFICATE



This is to certify that

**Shijiru Sdn. Bhd.**  
**Vivo Raiser Sdn. Bhd.**

No. 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani, 08000 Sungai Petani, Kedah Darul Aman, Malaysia.

Quality Management System has been assessed and registered as conforming with the requirements of the ISO 9001:2015.

Scope:

**Shijiru Sdn. Bhd.**

Supply and Labour for Plastering, Skim Coating and Plasterboard Ceiling

**Vivo Raiser Sdn. Bhd.**

Manufacture for Plaster Additive, Skim Coat, Render, Tile-Adhesive and Cementitious Waterproofing


Certificate Registration No. 000721-1-MY-1-QMS

Certified Since	12.04.2018
Valid from	17.06.2019
Valid until	11.04.2021

Managing Director



JAS-ANZ



Business Systems Certification Pty, Ltd. (BCert) P.O. Box 75, St Marys NSW 1790, Australia

Certification is subject to satisfactory ongoing Surveillance Assessments.

The validity of this certificate can be verified at [www.jas-anz.org/register](http://www.jas-anz.org/register)

Issue No.1 Date. 17.06.2019

# Certificate of Registration



This is to certify that the Environmental Management System of

**VIVO RAISER SDN. BHD.**

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

**ISO 14001:2015**  
(Environmental Management System)

## SCOPE

**Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and  
Cementitious Waterproofing**

(IAF Code: 12)

Certificate Number : 180325026036

Initial Registration Date : 18-Mar-2025

1<sup>st</sup> Surveillance Date : 18-Feb-2026

Next Due Date : 17-Mar-2026

Certificate Expiry Date : 17-Mar-2028

**To verify certificate, visit at :**

[www.arscert.com](http://www.arscert.com)

[www.uafaccreditation.org](http://www.uafaccreditation.org)

[www.iafcertsearch.org](http://www.iafcertsearch.org)

Issued by ARS Assessment Private Limited

  
Managing Director



CB-MS-3926



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on [info@arscert.com](mailto:info@arscert.com)