




TPS RENDER GREY 553 ECO SERIES

HIGH QUALITY WATER RESISTANT RENDER FOR INTERNAL & EXTERNAL WALL
ALSO USED TO PATCH UP CONCRETE SURFACE



TECHNICAL DATA	
Packing	40Kg
Colour	Grey
Mixing Ratio	20Kg Render + 4kg Clean Water
Coverage (Approx)	2.5m ² at 12mm thickness
Grade	  
Item Code	E04
Max Thickness	20mm per coat

APPLICATION



Apply first coat to patch up undulating surface.
Apply second coat to level the surface.



As conventional plastering, TPS Render Grey always finished with sponge finish.

HOW TO USE

华语



EN



TECHNICAL DATA



VALUED CUSTOMER





TECHNICAL DATA SHEET

TPS RENDER GREY 553

PRODUCT DESCRIPTION

TPS Render Grey 553 is a high quality cement-based and water resistant render plaster which can be used in interior and exterior conditions.

USES

Application on concrete substrate, hollow block & bricks, precast unit & most of the cement substrates.

ADVANTAGES


- ✓ Good crack bridging capability
- ✓ Mixes and applies easily
- ✓ Very good adhesion to substrates
- ✓ High compressive strength
- ✓ Non-toxic, same as cement
- ✓ Improve bond strength
- ✓ Improve productivity
- ✓ High quality sponge surface

PRODUCT DATA

Form	: Powder
Appearance / Colours	: White
Packaging	: 40 kg
Storage Conditions / Shelf Life	: 6 months from the date of production if stored properly in original, unopened and undamaged sealed packaging, in cool, dry conditions. Keep away from direct sunlight.

HEALTH AND SAFETY INFORMATION

For information and advice on the safe handling, storage, and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet (available upon request) containing physical, ecological toxicological and other safety-related data

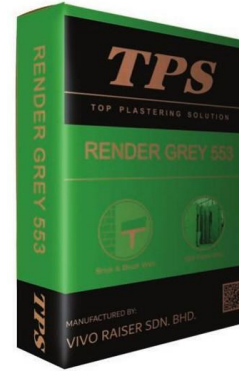

SYSTEM INFORMATION

Application Details	: 20kg TPS Render Grey 553 + 4kg Clean Water
Mixing ratio	: 20kg TPS Render Grey 553 + 4kg Clean Water
Coverage	: 40kg for 3m ² per coat at 20mm thickness (According to mixing ratio above)
Substrate Preparation	: Concrete or plaster surfaces must be clean, free from grease, oil and loosely adhering particles.

APPLICATION INSTRUCTIONS

Application Method / Tools	: Refer Method Statement.
Cleaning of Tools	: Clean all tools and application equipment with water immediately after use.
Pot Life (maximum)	: 240 minutes (at room temperature). Pot life is shorter at higher temperatures.
Notes on Application / Limitations	: Do not use on painted surface.

LEGAL NOTES

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parent's companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

VIVO RAISER SDN. BHD. (920807-P)

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA

Phone: 04-4102148 Email: sales@shijiru.com Website: www.shijiru.com



华语



ISO 9001:2015





SIRIM QAS International Sdn. Bhd.
(Company No.: 199601037981 (410334-X))
No.1, Persiaran Dato' Menteri, P.O.BOX 7035, Section 2,
40700 Shah Alam, Selangor Darul Ehsan, Malaysia
Tel: 03-55445872
Fax: 03-55445886
www.sirim-qas.com.my

TEST REPORT

REPORT NO : 2020CB0773

PAGE : 1 OF 5

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

THIS TEST REPORT IS ISSUED IN SECURED PDF SOFTCOPY

Applicant : VIVO RAISER SDN BHD
No: 9 & 10, Jalan PKNK 3/7,
Kawasan Perusahaan Sungai Petani,
08000 Sungai Petani,
Kedah.

Manufacturer : VIVO RAISER SDN BHD

Product : Rendering Mortar (Render Grey)

Reference Standard / Method of Test : 1) ASTM C348-14, Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars
2) ASTM C349-08, Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using Portions of Prism Broken in Flexure)
3) ASTM D7234-12, Standard Test Method for Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers

Description of sample : One (1) bag of 10 kg Rendering Mortar (Render Grey) was received for testing.
Brand: TPS
Model: Render Grey
Product Description: High quality cement- based and water resistant pre-packed plaster

Date Received of Complete Application : 18 September 2020

Job No. : J20201430553

Description of Test Results : The test results of the submitted test sample are described in Page 2, 3, & 4 of this test report.

Issued Date : 10 December 2020

Approved Signatory;

(HANON NAZIR BIN MOHD BASOR)
Senior Testing Executive



(Handwritten Signature)

(NOR SIHA BINTI RAJA ABDUL HANAN)
Head
Civil & Construction Section
Testing Services Department

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

TEST RESULTS:

Product : Rendering Mortar (Render Grey)
 Mix ratio : 30 % of water
 Method of test : ASTM C348-14,
 Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars.

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Determination of Flexural Strength	<u>28 days</u> 1) 2.9 N/mm ² 2) 3.0 N/mm ² 3) 3.1 N/mm ² Mean: (3.0 ± 0.08*) N/mm ²

Note:

- 1) Testing period – 12th October 2020 to 27th November 2020.
- 2) Where the reported uncertainty is calculated using a coverage factor $k=2$, which gives a level of confidence of approximately 95%.
- 3) *Denotes measurement uncertainty

(The remainder of this page is intentionally left blank)



--	--	--

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

TEST RESULTS:

Product : Rendering Mortar (Render Grey)
 Mix ratio : 30 % of water
 Method of test : ASTM C349-08,
 Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using Portions of Prism Broken in Flexure)

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Determination of Compressive Strength	<u>28 days</u> 1) 8.4 N/mm ² 2) 8.5 N/mm ² 3) 8.6 N/mm ² 4) 9.0 N/mm ² 5) 8.8 N/mm ² 6) 8.7 N/mm ² Mean: (8.7 ± 0.23*) N/mm ²

Note:

- 1) Testing period – 12th October 2020 to 27th November 2020.
- 2) Where the reported uncertainty is calculated using a coverage factor $k=2$, which gives a level of confidence of approximately 95%.
- 3) *Denotes measurement uncertainty

(The remainder of this page is intentionally left blank)



--	--	--

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

TEST RESULTS:

Product : Rendering Mortar (Render Grey)
 Mix ratio : 30 % of water
 Method of Test : ASTM D7234-12,
 Standard Test Method for Pull-Off Adhesion Strength of Coatings on
 Concrete Using Portable Pull-Off Adhesion Testers

NO.	TYPE OF TEST METHODS	TEST RESULT
1.	Measurement of bond strength by Pull-Off Using Portable Adhesion Tester between concrete substrate and Rendering Mortar (Render Grey)	<p><u>Pull-off Adhesion Strength</u></p> <p>1) 0.94 N/mm² 2) 0.90 N/mm² 3) 0.96 N/mm² 4) 0.89 N/mm² 5) 0.84 N/mm² Mean: (0.91 ± 0.03*) N/mm²</p> <p><u>Mode of failure (Fracture pattern)</u></p> <p>Cohesion failure in the Rendering Mortar (Render Grey)</p>

Note:

- 1) Testing period – 12th October 2020 to 27th November 2020.
- 2) Where the reported uncertainty is calculated using a coverage factor k=2, which gives a level of confidence of approximately 95%.
- 3) *Denotes measurement uncertainty

(The remainder of this page is intentionally left blank)



--	--	--

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This Test Report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE), SIRIM QAS International Sdn. Bhd. Please refer to the last page of this Test Report for Conditions Relating to the Use of Test Report.

CONDITIONS RELATING TO THE USE OF SIRIM QAS INTERNATIONAL TEST REPORT

1. A Test Report will be issued in respect of Testing Services conducted and shall relate only to the sample actually tested. SIRIM QAS International makes no warranty whatsoever and the Applicant shall not represent in any manner that any duplication or mass production of the Product is same as the sample actually tested or that SIRIM QAS International has tested any of the duplicated or mass-produced Product. Measurement uncertainty shall be included in the Test Report when there is no statement of conformity required. When a statement of conformity to a specification or standard is applied, the Simple Acceptance Rule is used. Unless otherwise stated, the Acceptance Rule with Guard Band is used.
2. The Test Report shall not be misused, amended, changed, varied or modified in any manner whatsoever by the Applicant or otherwise.
3. If the Test Report is to be furnished to any third party or to the public, each such Test Report shall be furnished in full, legible and in its entirety.
4. The Test Report shall not be reproduced and shall not in any event be used for any advertising purposes or whatsoever without written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE) of SIRIM QAS International of No 1, Persiaran Dato' Menteri, Building 8, Section 2, P.O. Box 7035, 40700 Shah Alam, Selangor Darul Ehsan.
5. Customer (Applicant/Manufacture/Factory,etc.) is not permitted to use any SIRIM QAS International, SIRIM or other SIRIM's subsidiaries logo or words on packaging, sample's manual, technical specification, items and products.
6. Subject to consent and written approval from the Head of Quality, Occupational Safety and Health & Environment (QOSHE) of SIRIM QAS International, the customer (Applicant/Manufacture/Factory,etc.) may use SIRIM QAS International logo or word on the promotional materials and the Applicant shall only include the phrase, "A sample of this product has been tested by SIRIM QAS International ...(Test Report No) ...(dated) ...(for what test) ...(to which standard)" or such similar words which stress that only the sample was actually tested. This phrase shall only be used for the purpose of product advertisement or product promotion (eg; brochures/flyers/official website). For avoidance of doubt, the statement shall not be used on the sample, packaging of the sample, items and products.
7. In the event there is an investigation from a Government Regulatory Agency concerning the Applicant's Test Report, SIRIM QAS International may disclose the information pertaining to the Test Report for purposes of such investigation.
8. Further or in the alternative, it is strictly forbidden unless with prior written approval from the Chief Executive Officer of SIRIM QAS International, to represent in any manner whatsoever that SIRIM QAS International, SIRIM and/or other SIRIM's subsidiaries has endorsed, approved or validated the Product of the Applicant in any manner whatsoever.
9. In the event the Applicant is found in breach of this provision, SIRIM QAS International, SIRIM and/or other SIRIM's subsidiaries without prejudice to any other rights and remedies may take whatever action necessary including but not limited to:
 - a) Informing and placing a notice in the media;
 - b) Obtaining an injunction from Court (cost on a solicitor-client basis to be borne by the Applicant);
 - c) Refusing to accept any further Product for Testing Services from the Applicant or whosoever related to the Applicant, whether subsidiary or otherwise;
 - d) Instructing the Applicant to withdraw and recall the advertisement, statement or document in question and advertise a clarification and apology to SIRIM QAS International, SIRIM and/or other SIRIM's subsidiaries twice in a national publication of SIRIM QAS International's choice at the Applicant's sole cost; and
 - e) Informing or lodging a report pertaining the Applicant's Test Report with the relevant authorities.
10. SIRIM QAS International is committed in supporting an environmentally-friendly business practices by reducing paper consumption, therefore we do not issue any hard copy of Test Report to the Applicant. However, additional certified true copy(ies) or softcopy of the Test Report may be issued upon request by the Applicant upon payment of the relevant fee. The certified true copy(ies) or softcopy of test report shall only be given for test report issued not more than three (3) years from the date of issuance.
11. Issuance of Amendment Report due to the following reasons are chargeable to the Applicant :
 - a) Changes in details of the Applicant name and/or address;
 - b) Changes in details of the Manufacturer's name and/or address;
 - c) Changes in details of the Factory location name and/or address;
 - d) Changes in details of the model and/or type designation
12. However, issuance of Supplementary Report due to the following reasons are FOC :
 - a) Misprints and typo errors;
 - b) Missing technical information as agreed in PP1 form;
 - c) Test data not reported;
 - d) Mistake in reporting of test data
13. Corrections to report shall only be allowed if the date of issuance of the original report has not exceeded 6 months and shall be limited to a maximum 3 times, after either case whichever occurs earlier, an Amendment or a Supplementary Report shall not be issued.



The Singapore Environment Council hereby grant

Vivo Raiser Sdn Bhd

No 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani
Sungai Petani 08000, Kedah, Malaysia

the right to use the Singapore Green Label for

TPS RENDER SERIES

022-145-3322

Environmentally Preferred Cement / Concrete Product

(In accordance to SEC Green Label Category 22: Cement and Concrete Products)

Validity: 5 June 2025 to 26 November 2026

Cheang Kok Chung
Executive Director



**Singapore
Environment
Council**



1 Kay Siang Road #07-01
Singapore 248922

METHOD STATEMENT

TPS RENDER GREY 553 40KG

1. INTRODUCTION

TPS Render Grey 40kg is a pre-mixed, cement-based rendering material designed for high-quality wall finishing prior painting. It delivers a level, durable, and weather-resistant surface suitable for concrete, masonry, and brick substrates.

Key Benefits:

- Consistent factory-controlled quality
- Excellent adhesion and workability
- Durable, crack-resistant finish
- Multi-layer application possible (**Max ~ ½ inches per coat at a time; up to 4 coat**)
- Suitable for interior and exterior use

2. SUBSTRATE PREPARATION & INSPECTION

1. Ensure all substrates (brick wall, block wall, or concrete) are clean, sound, and free of dust, grease, oil, formwork oil, paint, or loose material.
2. Repair cracks or holes using appropriate filler and all mechanical and electrical (M&E) chasing must be patched and cured prior to rendering.
3. For absorbent or porous substrates (such as AAC blocks or dry red bricks), lightly dampen the surface with clean water before application to prevent rapid moisture loss or apply a bonding agent.
4. Mask surrounding areas to prevent splashes.
5. For smooth concrete surfaces (shear walls/columns), apply a "spatter dash" key coat or a bonding agent primer if required by the project specification.



3. MATERIAL PREPARATION

- One (1) bag of TPS RENDER GREY 553= 40 kg.

Water required: 9.6 liters (24% by weight of cement)

***Mixing water must be potable, free from salts and organic impurities.*

- Coverage: 40kg for 3m² per coat at 10mm thickness

4. MIXING PROCEDURE

- a) Pour the measured clean water into a suitable mixing container.
- b) Gradually add the powder while mixing continuously with a slow-speed drill mixer (400–600 rpm).
- c) Mix for 3–5 minutes until a smooth, homogenous, lump-free paste is achieved.
- d) Allow the mixture to stand (slake) for 3–5 minutes. Re-mix before application.
- e) Do not add extra water after mixing.

***Pot life: Up to 45minutes after mixing.*



5. APPLICATION

1. Apply render using a trowel in **10–12mm per coat**.
2. For thicker finishes, apply multiple layers, allowing each coat to firm up before next application.
3. Immediately after application, use an aluminium straight edge to rule off and level the surface vertically and horizontally and fill in any hollows or depressions with fresh material and re-level.
4. Apply texture or finish with sponge or float as required (during touch-dry).
5. Protect fresh render from direct sun, strong wind, or rain.

**Avoid over-troweling, as this may cause surface cracking or powdering.

**Avoid over-sponging, which can bring excess water to the surface and cause crazing.

6. TECHNICAL SPECIFICATION

Parameter	Typical Value / Range
Layer Thickness	10–12 mm per coat
Coverage	~3 m ² per 40kg per 10mm thickness
Compressive Strength (28 days)	3.5–7.5 MPa
Adhesion to Substrate	≥ 0.5 MPa
Water Absorption	< 5%
Pot Life	30–45 minutes
Open Time	10–15 minutes
Initial Set	1–2 hours
Final Set	4–6 hours
Storage Life	6 months (dry, cool storage)

Curing Process

1. Protect freshly rendered walls from vibration, impact, and direct rain during the initial setting.
2. **Air Curing:** Natural air curing is sufficient under normal site conditions. Do not use curing compounds.
3. Allow the render to cure for a minimum of **3-7 days** (depending on thickness and weather) before applying Skim Coat or Paint.

7. SAFETY COMPLIANCE

1. Wear gloves, goggles, and dust mask. Avoid inhalation of dust and contact with skin.
2. First aid: In case of contact with skin or eyes, rinse immediately with clean water and seek medical advice if irritation persists.
3. Dispose of waste and wash water responsibly; do not discharge into drains or waterways.



8. DISCLAIMER

The information provided herein is based on our best knowledge and is intended as a general guide for the proper use of TPS Render Grey 553. Conditions of use are beyond the manufacturer's control, and no warranty is expressed or implied. It is the responsibility of the applicator/contractor to determine the suitability of the product for the intended application.

Last Revision: [23/1/2026]



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-017

SAFETY DATA SHEET

1. PRODUCT & COMPANY INFORMATION

General Product Name : **TPS Render Grey**
Product Description : **Cement-based product formulated for thin cementitious plaster**

2. COMPOSITION/INFORMATION ON INGREDIENTS

Name	CAS #	Description
Colored Composite Cement	65997-15-1	A preparation of cementitious mix based on a significant portion of portland cement, graded limestone powders, graded sand and other chemicals. Detail information on content is confidential.

3. HAZARDS IDENTIFICATION

Classification of the hazardous chemical

Skin corrosion/irritation : Category 2
Serious eye damage/eye irritation : Category 1
Skin sensitisation : Category 1

Label elements

Hazard pictograms :



Signal word : **Danger**

Hazard statements : H315 Causes skin irritation.
H317 May cause an allergic skin reaction.
H318 Causes serious eye damage.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-017

Precautionary statements : **Prevention:**
P261 Avoid breathing dust.
P264 Wash skin thoroughly after handling.
P280 Wear protective gloves/ eye protection/ face protection.

Response:

P305 + P351 + P338 + P310 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.
P333 + P313 If skin irritation or rash occurs: Get medical advice/ attention.
P362 Take off contaminated clothing and wash before reuse.

Other hazards which do not result in classification

None known.

4. FIRST AID MEASURES

If irritation or other symptoms (as noted above) occur or persist from any route of exposure, remove the affected individual from the area and get medical aid.

EYES: Irrigate eyes with a heavy stream of water for at least 15 to 20 minutes. Occasionally lifting the upper and lower eyelids with fingers and roll eyes in circular motion. Get medical aid if needed.

SKIN: Wash exposed areas of the body with soap and water. Get medical aid if irritation develops or persists

INHALATION: Remove from area of exposure and move to fresh air immediately; seek medical attention if symptoms persist.

INGESTION: Never give anything by mouth to an unconscious person. Get medical aid. Do not induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cups or milk or water.

Note to Physician: Treat symptomatically and supportively.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-017

5. FIRE FIGHTING MEASURES

Extinguishing Media

Dry chemical, foam, water, or extinguishing media appropriate for surrounding fire.

Unusual Fire and Explosion Hazards

Material poses no fire-related hazard.

Special hazards arising from the mixture

None known

Special Protective Equipment and Precautions for Firefighters

A SCBA is recommended to limit exposures to combustion products when fighting any fire.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

: Use personal protective equipment. Avoid breathing dust.
Deny access to unprotected persons.

Environmental precautions

: Do not flush into surface water or sanitary sewer system.

Methods and materials for containment and cleaning up

: Pick up and arrange disposal without creating dust.
Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Handling:

Keep away from heat. Do not ingest. If ingested, seek medical advice immediately and show the container or the label. Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Avoid drinking, tasting, swallowing or ingesting this product. Provide eyewash fountains and safety showers in the work area.

Storage:

No special packaging required. Not classified as dangerous goods under the United Nations Transport Recommendations.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-017

8. EXPOSURE CONTROL /PERSONAL PROTECTION

Engineering Controls:

Facilities storing or utilizing this materials should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low. Always provide effective general and when necessary local exhaust ventilation to draw spray, aerosol, fume, mist, and vapour away from workers to prevent routine inhalation.

RESPIRATORY PROTECTION:

In case of insufficient ventilation, wear suitable respiratory equipment

PERSONAL PROTECTIVE EQUIPMENT EYES:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

OTHER PROTECTIVE MEASURES:

Employees must practice good personal hygiene, washing exposed areas of skin several times daily and laundering contaminated clothing before re-use.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Powder

Appearance: Grey

Odour: Odourless

PH @ 1.0% H₂O: 6.0 – 8.0

Vapour Pressure: Not available.

Vapour Density, Not available.

Boiling Point: Not available.

Freezing/ Melting Point: Not available.

Decomposition Temperature: Not available.

Volatiles, % by weight: Not available.

Specific Gravity (H₂O=1): Not available.

Solubility in H₂O, % by Volume: Soluble

Evaporation Rate: Not available.

Viscosity: Not available.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-017

10. STABILITY AND REACTIVITY

GENERAL: This product is stable.

CONDITIONS TO AVOID: Incompatible materials, dust generation, excess heat

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID: Strong oxidizing agents HAZARDOUS

DECOMPOSITION PRODUCTS: Combustion produces carbon monoxide, carbon dioxide.

HAZARDOUS POLYMERIZATION: Has not been reported.

11. Toxicological Information

Potential Health Effects:

CAUTION! Repeated inhalation of dust can cause sensitization to susceptible individuals & may cause eye irritation. Pre-existing skin problem may be aggravated by prolonged or repeated contact.

INHALATION: Dust inhalation may cause coughing, mucous production and shortness of breath.

EYE CONTACT: Direct contact may cause irritation.

SKIN CONTACT: Prolonged or repeated contact is no expected to create acute health effects.

INGESTION: No ingestion effect known.

Chronic health effects: None known

Symptoms / Sign of exposure: Irritation

Routes of exposure: Eye contact, Inhalation

Carcinogenic status: The components of this mixture are not known to be listed or regulated by IARC, NTP, OSHA, ACGIH.

As with all chemicals for which test data are limited or non-exist, caution must be exercised through the prudent use of protective equipment and handling procedure to minimise exposure.



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-017

12. Ecological Information

Ecotoxicity

No data available

Persistence and degradability

No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : Send to a licensed waste management company.

Contaminated packaging : Empty remaining contents. Dispose of as unused product.
Do not re-use empty containers.

14. TRANSPORT INFORMATION

International Regulations

UNRTDG

UN number : Not applicable
Proper shipping name : Not applicable
Class : Not applicable
Subsidiary risk : Not applicable
Packing group : Not applicable
Labels : Not applicable
Environmentally hazardous : no

IATA-DGR

UN/ID No. : Not applicable



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004
9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI
08000 SUNGAI PETANI, KEDAH, MALAYSIA
☎ 04-4102148 ✉ sales@shijiru.com



VR2022-017

Proper shipping name : Not applicable
Class : Not applicable

Subsidiary risk : Not applicable
Packing group : Not applicable
Labels : Not applicable
Packing instruction (cargo aircraft) : Not applicable
Packing instruction (passenger aircraft) : Not applicable

IMDG-Code

UN number : Not applicable
Proper shipping name : Not applicable
Class : Not applicable
Subsidiary risk : Not applicable
Packing group : Not applicable
Labels : Not applicable
EmS Code : Not applicable
Marine pollutant : Not applicable

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied. No special precautions are needed apart from those mentioned under heading 8.

15. REGULATORY INFORMATION:

Safety, health, and environmental regulations specific for the hazardous chemical

Occupational Safety and Health (Classification, Labelling and Safety Data Sheet of Hazardous Chemicals) Regulations 2013.

Occupational Safety and Health (Use and Standards of Exposure of Chemicals Hazardous to Health) Regulations 2000.

International Chemical Weapons Convention (CWC)

Schedules of Toxic Chemicals and Precursors: Not applicable



VIVO RAISER SDN. BHD.

RegNo: 201001036884 | TIN: C21294886050 | MSIC Code: 23959 | SST No: A10-2508-22200004

9 & 10, JLN PKNK 3/7, KAWASAN PERUSAHAAN SUNGAI PETANI

08000 SUNGAI PETANI, KEDAH, MALAYSIA

☎ 04-4102148

✉ sales@shijiru.com



VR2022-017

16. OTHER INFORMATION:

SDS Prepared by: Vivo Raiser Sdn Bhd

Phone Number: +6044102148

Date of Preparation: 1 January 2017

Revision indicators and Date

Effective Date Change: 1 December 2022 Supersedes: 5 May 2018

Format Changes: Conforms to OSHA 29CFR 1910.1200 (HCS)

This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any other process. Such information is to the best of the company's knowledge and believed accurate and reliable as of the date indicated. However, no representation, warranty or guarantee of any kind, express or implied, is made as to its accuracy, reliability or completeness and we assume no responsibility for any loss, damage or expense, direct or consequential, arising out of use. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Neither Shijiru Sdn Bhd nor any of its parents companies assumes any liability what so ever for the accuracy or completeness of the information contained herein.

CERTIFICATE



This is to certify that

Shijiru Sdn. Bhd.
Vivo Raiser Sdn. Bhd.

No. 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani, 08000 Sungai Petani, Kedah Darul Aman, Malaysia.

Quality Management System has been assessed and registered as conforming with the requirements of the ISO 9001:2015.

Scope:

Shijiru Sdn. Bhd.

Supply and Labour for Plastering, Skim Coating and Plasterboard Ceiling

Vivo Raiser Sdn. Bhd.

Manufacture for Plaster Additive, Skim Coat, Render, Tile-Adhesive and Cementitious Waterproofing

Certificate Registration No. 000721-1-MY-1-QMS

Certified Since	12.04.2018
Valid from	17.06.2019
Valid until	11.04.2021

Managing Director



JAS-ANZ



Business Systems Certification Pty, Ltd. (BCert) P.O. Box 75, St Marys NSW 1790, Australia

Certification is subject to satisfactory ongoing Surveillance Assessments.

The validity of this certificate can be verified at www.jas-anz.org/register

Issue No.1 Date. 17.06.2019

Certificate of Registration



This is to certify that the Environmental Management System of

VIVO RAISER SDN. BHD.

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

ISO 14001:2015
(Environmental Management System)

SCOPE

**Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and
Cementitious Waterproofing**

(IAF Code: 12)

Certificate Number : 180325026036

Initial Registration Date : 18-Mar-2025

1st Surveillance Date : 18-Feb-2026

Next Due Date : 17-Mar-2026

Certificate Expiry Date : 17-Mar-2028

To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited


Managing Director



CB-MS-3926



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com

Certificate of Registration



This is to certify that the Occupational Health and Safety Management System of

VIVO RAISER SDN. BHD.

9 & 10, Jln Pknk 3/7, Kawasan Perindustrian Sungai Petani, 08000 Sungai Petani, Kedah, Malaysia.

is in accordance with the requirements of the following standard

ISO 45001:2018

(Occupational Health and Safety Management System)

SCOPE

Manufacture for Plaster Additive, Skim Coat, Tile-Adhesive and
Cementitious Waterproofing

(IAF Code: 12)

Certificate Number : 270225036005

Initial Registration Date : 27-Feb-2025

st Surveillance Date : 27-Jan-2026

Next Due Date : 26-Feb-2026

Certificate Expiry Date : 26-Feb-2028


To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited

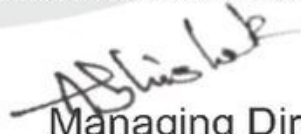
Managing Director



CB-MS-3919



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com

Certificate of Registration



This is to certify that the Quality Management System of
VIVO RAISER SDN. BHD.
SHIJIRU SDN. BHD.

HQ: No. 9 & 10, Jalan PKNK 3/7, Kawasan Perusahaan Sungai Petani, 08000 Sungai Petani, Kedah Darul Aman, Malaysia.
Branch: No 27 & 29, Laluan Industri Lahat 1, Kawasan Perindustrian Lahat, 31450 Ipoh, Perak, Malaysia.

is in accordance with the requirements of the following standard

ISO 9001:2015
(Quality Management System)

SCOPE

Supply of Materials and Labour for Plastering, Skim Coating and Plasterboard Ceiling
and Manufacture for Plaster Additive, Skim Coat, Render, Tile-
Adhesive and Cementitious Waterproofing Chemical

(IAF Code: 29,35,12)

Certificate Number : 111125016018

Initial Registration Date : 11-Nov-2025

1st Surveillance Date : 10-Oct-2026

Next Due Date : 10-Nov-2026

Certificate Expiry Date : 10-Nov-2028

To verify certificate, visit at :

www.arscert.com

www.uafaccreditation.org

www.iafcertsearch.org

Issued by ARS Assessment Private Limited

Abhishek
Managing Director



CB-MS-3923



UAF Address : 400, North Center Dr, STE 202, Norfolk, VA 23502, United States of America

This certificate remains the property of ARS and must be returned to ARS on Cancellation or Suspension of the certificate. Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standard may be obtained by consulting the Organisation on info@arscert.com