

TPS CRACK SEALER PRO

REPAIR HAIRLINE & MOVABLE CRACK




WINDOW & DOOR FRAME HAIRLINE CRACK



CEILING HAIRLINE CRACK



CONCRETE HAIRLINE CRACK

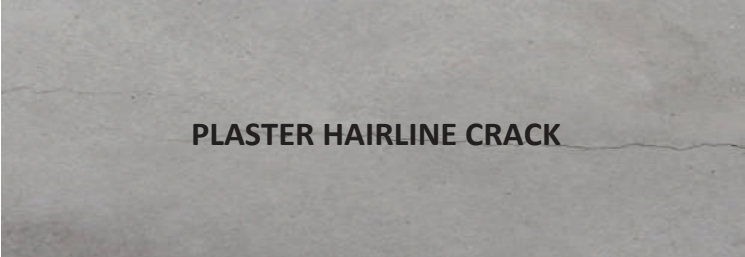


PLASTER HAIRLINE CRACK

TECHNICAL DATA

Packing	☐ 1Kg ☐ 5Kg ☐ 20Kg
Binder	PU & Styrene Acrylic Copolymer
Thickness	1-2mm Per Coat
Coverage (2 coats)	On rough surface: 1.4m ² /kg On smooth surface: 2.7m ² /kg
Item Code	1Kg TPS G05A 5Kg TPS G05 20Kg TPS G05B

PROFESSIONAL CRACK REPAIR GUIDE FOR WALLS

FOR CRACK LINE **BIGGER THAN 2MM**, PATCH UP WITH **TPS SKIM COAT** OR **TPS PATCHING** FIRST.

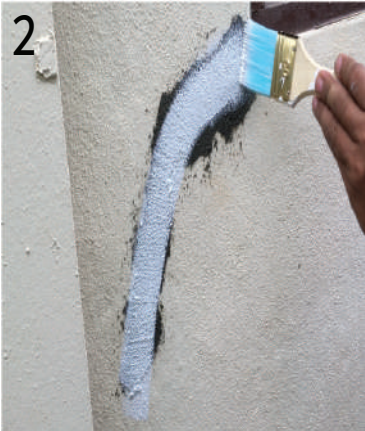

HOW TO USE



TECHNICAL DATA



VALUED CUSTOMER

