# TPS CRACK SEALER PRO SERIES

REPAIR HAIRLINE & MOVABLE CRACK







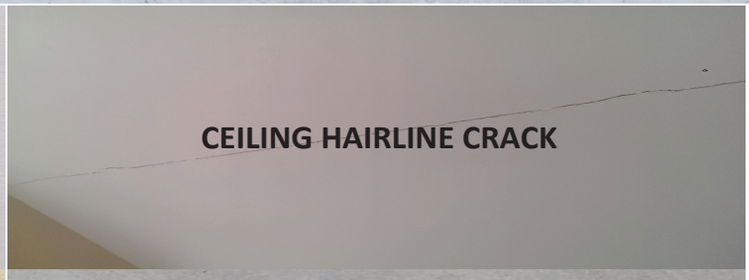





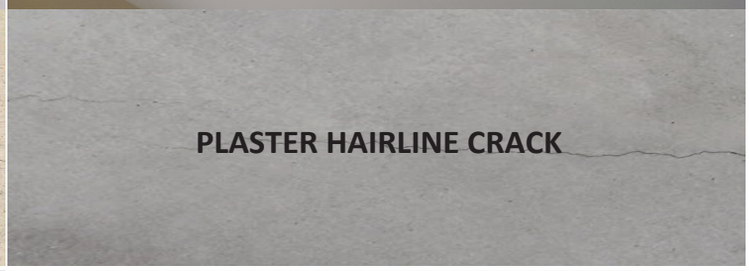


## TECHNICAL DATA

| | |
|---|---|
| **Packing** | ☐1Kg ☐5Kg ☐20Kg |
| **Binder** | PU & Styrene Acrylic Copolymer |
| **Thickness** | 1-2mm Per Coat |
| **Coverage (2 coats)** | On rough surface: 1.4m² /kg<br>On smooth surface: 2.7m² /kg |
| **Item Code** | **WHITE**<br>1Kg TPS G05A<br>5Kg TPS G05<br>20Kg TPS G05B<br>**GREY**<br>1Kg TPS G05C<br>5Kg TPS G05D<br>20Kg TPS G05E |

## PROFESSIONAL CRACK REPAIR GUIDE FOR WALLS

FOR CRACK LINE **BIGGER THAN 2MM**, PATCH UP WITH **TPS SKIM COAT** OR **TPS PATCHING** FIRST.




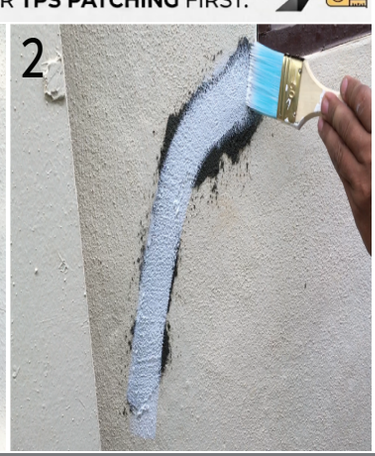


HOW TO USE

TECHNICAL DATA

VALUED CUSTOMER